

AUTOMOTIVE MULTILAYER CERAMIC CHIP CAPACITORS

- GMT SERIES -


SCOPE

- Consists of conducting material and electrodes - to achieve chip-type SMT and small size, high density and high efficiency ceramic condensers are used
- NPO/X7R dielectrics provides product with high electrical precision, stability and reliability
- Assured quality performance in automotive applications qualified to AEC-Q200

APPLICATIONS

- For navigation and information equipment
- For entertainment equipment
- For comfortable equipment
- For automotive electronic equipment

CONSTRUCTION AND DIMENSIONS

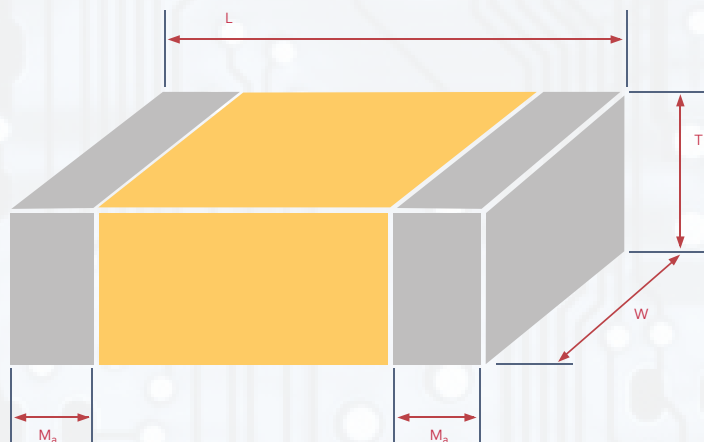

FEATURES

- Wide selection of sizes available
- High capacitance in given case size
- Lead free termination (pure Tin)
- Meets AEC-Q200 requirement

SIZE INCH (MM)	L (MM)	W (MM)	T (MM) / SYMBOL	REMARK	MA (MM)
0201 (0603)	0.60±0.03	0.30±0.03	0.30±0.03	#	0.15±/-0.05
0402 (1005)	1.00±0.05	0.50±0.05	0.50±0.05	#	0.25±0.05 /-0.10
0603 (1608)	1.60±0.10	0.80±0.10	0.80±0.07		0.45±0.15
	1.60±0.15/-0.10	0.80±0.15/-0.10	0.80±0.15/-0.10		
0805 (2012)	2.00±0.15	1.25±0.10	0.60±0.10		0.50±0.20
			0.80±0.10		
			1.25±0.10	#	
1206 (3216)	3.20±0.15	1.60±0.15	0.80±0.10		0.60±0.20
			0.95±0.10		
			1.25±0.10	#	
	3.20±0.20	1.60±0.20	1.15±0.15	#	
			1.60±0.20	#	
1210 (3225)	3.20±0.30	2.50±0.20	1.60±0.3/-0.10	#	0.75±/-0.25
			0.95±/-0.10	#	
			1.60±/-0.20	#	
	3.20±0.40	2.50±0.30	2.00±/-0.20	#	
			2.50±/-0.30	#	

PART NUMBER

GMT	04	CG	102	J	50	NT	4
PRODUCT TYPE	DIMENSIONS	DIELECTRIC	CAPACITANCE	TOLERANCE	RATED VOLTAGE	PACKAGING CODE	REEL SIZE
AECQ200 Qualified	02 - 0201 04 - 0402 10 - 0603 21 - 0805 31 - 1206 32 - 1210	CG - NPO / C0G X7R - X7R	0R5: 0.5pF 5R0: 5pF 100: 10pF 101: 10pF 102: 1000pF 103: .01uF 104: 1uF 105: 1.0uF 106: 10uF	A: ± 0.05pF B: ± 0.1pF C: ± 0.25pF D: ± 0.5pF F: ± 1% G: ± 2% J: ± 5% K: ± 10% M: ± 20%	6R3: 6.3 VDC 10: 10 VDC 16: 16 VDC 25: 25 VDC 35: 35 VDC 50: 50 VDC 100: 100 VDC 200: 200 VDC 250: 250 VDC 630: 630 VDC 1K0: 1000 VDC	NT: Sn/Ni XT: Nickel Barrier/ Flex Term.	1: 1K reel 3: 3K reel 4: 4K reel 6: 6K reel 8: 8K reel 10: 10K reel 15: 15K reel **See packaging quantity on page 1 for more info



PACKAGING STYLE AND QUANTITY

SIZE	THICKNESS (MM) / SYMBOL	PAPER TAPE		PLASTIC TAPE	
		7" REEL	13" REEL	7" REEL	13" REEL
0201 (0603)	0.30±0.03	15K	70K	-	-
0402 (1005)	0.50±0.05	10K	50K	-	-
0603 (1608)	0.80±0.07	4K	15K	-	-
	0.80±0.15/-0.10	4K	15K	-	-
0805 (2012)	0.60±0.10	4K	15K	-	-
	0.80±0.10	4K	15K	-	-
	1.25±0.10	-	-	3K	10K
	1.25±0.20	-	-	3K	10K
1206 (3216)	0.80±0.10	4K	15K	-	-
	0.95±0.10	-	-	3K	10K
	1.15±0.15	-	-	3K	10K
	1.25±0.10	-	-	3K	10K
	1.60±0.20	-	-	3K	10K
	1.60±0.30/-0.10	-	-	3K	10K
1210 (3225)	0.95±0.10	-	-	3K	10K
	1.25±0.10	-	-	3K	10K
	1.60±0.20	-	-	2K	8K
	2.00±0.20	-	-	1K	6K
	2.50±0.30	-	-	1K	6K



STANDARD ELECTRICAL SPECIFICATIONS

DIELECTRIC	NP0	X7R
SIZE	0201, 0402, 0603, 0805, 1206, 1210	0201, 0402, 0603, 0805, 1206, 1210
CAPACITANCE RANGE*	0.1pF to 0.047μF	100PF to 10μF
CAPACITANCE TOLERANCE**	Cap≤5pF: A (±0.5pF), B (±0.1pF), C (±0.25pF) 5pF<Cap<10pF: B (±0.1pF), C (±0.25pF), D (±0.25pF) Cap≥10pF: F (±1%), G (±2%), J (±5%)	J (±5%), K (±10%), M (±20%)
RATED VOLTAGE (WVDC)	250V, 500V, 630V 1000V	
TAN δ*	Cap <30pF: Q≥400+200C Cap ≥30pF: Q≥1000	Note 1
INSULATION RESISTANCE AT UR	≥10GΩ or RxC≥500ΩxF whichever is less	
OPERATING TEMPERATURE	-55 TO +125°C	
CAPACITANCE CHARACTERISTIC	±30ppm/ °C	±15%
TERMINATION	Ni/Sn (lead-free termination)	

RATED VOL.	D.F.≤	EXCEPTION OF D.F.≤	
≥50V	≤2.5V	≤3%	0603≥0.047uF; 0805≥0.18uF; 1206≥0.47uF
		≤5%	1210≥4.7uF
		≤10%	0603≥1uF; 0805≥1uF; 1206≥0.47uF; 1210≥10uF
35V	≤3.5%	≤10%	0805≥2.2uF; 1210≥10uF
25V	≤3.5%	≤5%	0805≥1uF; 1210≥10uF
		≤7%	0603≥0.33uF; 1206≥0.47uF
		≤10%	0402≥0.10uF; 0603≥0.47uF 0805≥2.2uF; 1206≥6.8uF; 1210≥22uF
16V	≤3.5%	≤5%	0402≥0.033uF; 0603≥0.15uF; 0805≥0.68uF; 1206≥2.2uF; 1210≥4.7uF
		≤10%	0402≥0.47uF; 0603≥0.68uF 0805≥2.2uF; 1206≥4.7uF; 1210≥22uF
10V	≤5%	≤10%	0402≥0.033uF; 0603≥0.33uF; 0805≥2.2uF; 1206≥2.2uF; 1210≥22uF
		≤15%	0402≥1uF
6.3V	≤10%	≤15%	0402≥1uF; 0603≥10uF; 0905≥2.2uF; 1206≥47uF; 1210≥100uF
		≤20%	0402≥2.2uF
4V	≤15%	---	---





DIMENSION (MM)		GMT02 (0201)					GMT04 (0402)					GMT10 (0603)						
RATED VOLTAGE		10	16	25	50	100	10	16	25	50	100	10	16	25	50	100	200	250
CAPACITANCE RANGE	0.1pF	0R1	A	A	A	A	B	B	B	B	B							
	0.2	0R2	A	A	A	A	B	B	B	B	B							
	0.3	0R3	A	A	A	A	B	B	B	B	B							
	0.4	0R4	A	A	A	A	B	B	B	B	B							
	0.5	0R5	A	A	A	A	B	B	B	B	B	D	D	D	D	D	D	D
	0.6	0R6	A	A	A	A	B	B	B	B	B	D	D	D	D	D	D	D
	0.7	0R7	A	A	A	A	B	B	B	B	B	D	D	D	D	D	D	D
	0.8	0R8	A	A	A	A	B	B	B	B	B	D	D	D	D	D	D	D
	0.9	0R9	A	A	A	A	B	B	B	B	B	D	D	D	D	D	D	D
	1	1R0	A	A	A	A	B	B	B	B	B	D	D	D	D	D	D	D
	1.2	1R2	A	A	A	A	B	B	B	B	B	D	D	D	D	D	D	D
	1.5	1R5	A	A	A	A	B	B	B	B	B	D	D	D	D	D	D	D
	1.8	1R8	A	A	A	A	B	B	B	B	B	D	D	D	D	D	D	D
	2.2	2R2	A	A	A	A	B	B	B	B	B	D	D	D	D	D	D	D
	2.7	2R7	A	A	A	A	B	B	B	B	B	D	D	D	D	D	D	D
	3.3	3R3	A	A	A	A	B	B	B	B	B	D	D	D	D	D	D	D
	3.9	3R9	A	A	A	A	B	B	B	B	B	D	D	D	D	D	D	D
	4.7	4R7	A	A	A	A	B	B	B	B	B	D	D	D	D	D	D	D
	5.6	5R6	A	A	A	A	B	B	B	B	B	D	D	D	D	D	D	D
	6.8	6R8	A	A	A	A	B	B	B	B	B	D	D	D	D	D	D	D
	8.2	8R2	A	A	A	A	B	B	B	B	B	D	D	D	D	D	D	D
	10	100	A	A	A	A	B	B	B	B	B	D	D	D	D	D	D	D
	12	120	A	A	A	A	B	B	B	B	B	D	D	D	D	D	D	D
	15	150	A	A	A	A	B	B	B	B	B	D	D	D	D	D	D	D
	18	180	A	A	A	A	B	B	B	B	B	D	D	D	D	D	D	D
	22	220	A	A	A	A	B	B	B	B	B	D	D	D	D	D	D	D
	27	270	A	A	A	A	B	B	B	B	B	D	D	D	D	D	D	D
	33	330	A	A	A	A	B	B	B	B	B	D	D	D	D	D	D	D
	39	390	A	A	A	A	B	B	B	B	B	D	D	D	D	D	D	D
	47	470	A	A	A	A	B	B	B	B	B	D	D	D	D	D	D	D
	56	560	A	A	A	A	B	B	B	B	B	D	D	D	D	D	D	D
	68	680	A	A	A	A	B	B	B	B	B	D	D	D	D	D	D	D
	82	820	A	A	A	A	B	B	B	B	B	D	D	D	D	D	D	D
	100	101	A	A	A	A	B	B	B	B	B	D	D	D	D	D	D	D
	120	121	A	A	A	A	B	B	B	B	B	D	D	D	D	D	D	D
	150	151					B	B	B	B	B	D	D	D	D	D	D	D
	180	181					B	B	B	B	B	D	D	D	D	D	D	D
	220	221					B	B	B	B	B	D	D	D	D	D	D	D
	270	271					B	B	B	B	B	D	D	D	D	D	E	E
	330	331					B	B	B	B	B	D	D	D	D	D	E	E
	390	391					B	B	B	B	B	D	D	D	D	D	E	E
	470	471					B	B	B	B	B	D	D	D	D	D	E	E
	560	561					B	B	B	B	B	D	D	D	D	D	E	E
	680	681					B	B	B	B	B	D	D	D	D	D	E	E
	820	821					B	B	B	B	B	D	D	D	D	D	E	E
	1000	102					B	B	B	B	B	D	D	D	D	D		
	1200	122										E	E	E	E	E		
	1500	152										E	E	E	E	E		
	180	182										E	E	E	E	E		
	2200	222										E	E	E	E			
	2700	272										E	E	E	E			
	3300	332										E	E	E	E			
	3900	392																
	4700	472																
	5600	562																
	6800	682																
	8200	822																
	0.010 uF	103																

T-MAX

A	B	C	D	E	F	G
0.33mm	0.55mm	0.7mm	0.87mm	0.95mm	1.05mm	1.35mm



DIMENSION (MM)			GMT21 (0805)								GMT31 (1206)										GMT32 (1210)										
RATED VOLTAGE			10	16	25	50	100	200	250	500	630	10	16	25	50	100	200	250	500	630	1000	10	16	25	50	100	200	250	500	630	1000
CAPACITANCE RANGE	0.1pF	OR1																													
	0.2	OR2																													
	0.3	OR3																													
	0.4	OR4																													
	0.5	OR5	C	C	C	C	C	C	C	C	C																				
	0.6	OR6	C	C	C	C	C	C	C	C	C																				
	0.7	OR7	C	C	C	C	C	C	C	C	C																				
	0.8	OR8	C	C	C	C	C	C	C	C	C																				
	0.9	OR9	C	C	C	C	C	C	C	C	C																				
	1	1R0	C	C	C	C	C	C	C	C	C																				
	1.2	1R2	C	C	C	C	C	C	C	C	C		E	E	E	E	E	E	E	E	E										
	1.5	1R5	C	C	C	C	C	C	C	C	C		E	E	E	E	E	E	E	E	E	E									
	1.8	1R8	C	C	C	C	C	C	C	C	C		E	E	E	E	E	E	E	E	E	E									
	2.2	2R2	C	C	C	C	C	C	C	C	C		E	E	E	E	E	E	E	E	E	E									
	2.7	2R7	C	C	C	C	C	C	C	C	C		E	E	E	E	E	E	E	E	E	E									
	3.3	3R3	C	C	C	C	C	C	C	C	C		E	E	E	E	E	E	E	E	E	E									
	3.9	3R9	C	C	C	C	C	C	C	C	C		E	E	E	E	E	E	E	E	E	E									
	4.7	4R7	C	C	C	C	C	C	C	C	C		E	E	E	E	E	E	E	E	E	E									
	5.6	5R6	C	C	C	C	C	C	C	C	C		E	E	E	E	E	E	E	E	E	E									
	6.8	6R8	C	C	C	C	C	C	C	C	C		E	E	E	E	E	E	E	E	E	E									
	8.2	8R2	C	C	C	C	C	C	C	C	C		E	E	E	E	E	E	E	E	E	E									
	10	100	C	C	C	C	C	C	C	C	C		E	E	E	E	E	E	E	E	E	E	F	F	F	F	F	F	F	F	F
	12	120	C	C	C	C	C	C	C	C	C		E	E	E	E	E	E	E	E	E	E	F	F	F	F	F	F	F	F	F
	15	150	C	C	C	C	C	C	C	C	C		E	E	E	E	E	E	E	E	E	E	F	F	F	F	F	F	F	F	F
	18	180	C	C	C	C	C	C	C	C	C		E	E	E	E	E	E	E	E	E	E	F	F	F	F	F	F	F	F	F
	22	220	C	C	C	C	C	C	C	C	C		E	E	E	E	E	E	E	E	E	E	G	F	F	F	F	F	F	F	F
	27	270	C	C	C	C	C	C	C	C	C		E	E	E	E	E	E	E	E	E	E	G	F	F	F	F	F	F	F	F
	33	330	C	C	C	C	C	C	C	C	C		E	E	E	E	E	E	E	E	E	E	G	F	F	F	F	F	F	F	F
	39	390	C	C	C	C	C	C	C	C	C		E	E	E	E	E	E	E	E	E	E	G	F	F	F	F	F	F	F	F
	47	470	C	C	C	C	C	C	C	C	C		E	E	E	E	E	E	E	E	E	E	G	F	F	F	F	F	F	F	F
	56	560	C	C	C	C	C	C	C	C	C		E	E	E	E	E	E	E	E	E	E	G	F	F	F	F	F	F	F	F
	68	680	C	C	C	C	C	C	C	C	C		E	E	E	E	E	E	E	E	E	E	G	F	F	F	F	F	F	F	F
	82	820	C	C	C	C	C	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	G	F	F	F	F	F	F	F	F
	100	101	C	C	C	C	C	E	E	E	E		E	E	E	E	E	E	E	E	E	E	G	F	F	F	F	F	F	F	G
	120	121	C	C	C	C	C	E	E	G	G		E	E	E	E	E	E	E	E	E	E	G	F	F	F	F	F	F	F	G
	150	151	C	C	C	C	C	G	G	G	G		E	E	E	E	E	E	E	E	E	E	G	F	F	F	F	F	F	F	G
	180	181	C	C	C	C	C	G	G	G	G		E	E	E	E	E	E	E	E	E	E	I	F	F	F	F	F	F	F	G
	220	221	C	C	C	C	C	G	G	G	G		E	E	E	E	E	E	E	E	E	E	I	F	F	F	F	F	F	F	I
	270	271	C	C	C	C	C	G	G	G	G		E	E	E	E	E	E	E	E	E	F	F	I	F	F	F	F	F	F	I
	330	331	C	C	C	C	C	G	G	G	G		E	E	E	E	E	E	E	E	F	F	F	I	F	F	F	F	F	F	I
390	391	E	E	E	E	E	G	G	G	G		E	E	E	E	E	E	E	E	F	F	F	I	F	F	F	F	F	F	I	
470	471	E	E	E	E	E	G	G	H	H		E	E	E	E	E	E	E	F	F	F	I	F	F	F	F	F	F	F	I	
560	561	E	E	E	E	E	G	G	H	H		E	E	E	E	E	E	E	F	G	G	G	I	F	F	F	F	F	F	I	
680	681	E	E	E	E	E	G	G	H	H		E	E	E	E	E	E	E	F	G	G	G	I	F	F	F	F	F	F	I	
820	821	E	E	E	E	E	G	G	H	H		E	E	E	E	E	E	E	F	I	I	I	I	F	F	F	F	F	F	I	
1000	102	E	E	E	E	E	G	G	H	H		E	E	E	E	E	E	E	F	I	I	I	I	F	F	F	F	G	G	I	
1200	122	E	E	E	E	E	G	G	H	H		E	E	E	E	E	E	E	F	I	I	I	I	F	F	F	F	G	G	J	
1500	152	E	E	E	E	E	G	G	H	H		E	E	E	E	E	E	E	G	I	I	I		F	F	F	F	G	G	J	
180	182	E	E	E	E	E	G	G	H	H		E	E	E	E	E	E	E	G	I	I	I		F	F	F	F	G	G	J	
2200	222	E	E	E	E	E	G	G	H	H		E	E	E	E	E	E	E	G	I	I	I		F	F	F	F	G	G	J	
2700	272	G	G	G	G	G	H	H				E	E	E	E	E	E	E	G	I	I	I		F	F	F	F	G	G	J	
3300	332	G	G	G	G	G	H	H				E	E	E	E	E	E	E	G	I	I	I		F	F	F	F	G	G	J	
3900	392	G	G	G	G	G	H	H				E	E	E	E	E	E	E	G	I	I	I		F	F	F	F	G	G	J	
4700	472	G	G	G	G	G	H	H				E	E	E	E	E	E	E	G	I	I	I		F	F	F	F	I	I	J	
5600	562	G	G	G	G	G						E	E	E	E	E	E	E	I	I			F	F	F	F	I	I	I	J	
6800	682	G	G	G	G	G						F	F	F	F	F	F	F	I	I			F	F	F	F	I	I	I	J	
8200	822	G	G	G	G	G						G	G	G	G	G	G	G	I	I			F	F	F	F	I	I	I	J	
0.010 uF	103	G	G	G	G	G						G	G	G	G	G	G	G	I	I			F	F	F	F	I	I	J	K	
0.012	123	G	G	G	G	G																G	G	G	G	G	J	J	K	K	
0.015	153	G	G	G	G	G																G	G	G	G	G	J	J	K	K	
0.018	193	G	G	G	G	G																									
0.022	223	G	G	G	G	G																									
0.027	273																														
0.033	333																														
0.039	393																														
0.047	473																														

T-MAX

A	B	C	D	E	F	G	H	I	J	K
0.33mm	0.55mm	0.7mm	0.87mm	0.95mm	1.05mm	1.35mm	1.45mm	1.8mm	2.2mm	2.8mm



DIMENSION (MM)			GMT02 (0201)				GMT04 (0402)				GMT10 (0603)				
RATED VOLTAGE			10	16	25	50	10	16	25	50	10	16	25	50	100
CAPACITANCE RANGE	100 pF	101	A	A	A	A	B	B	B	B	D	D	D	D	D
	120	121	A	A	A	A	B	B	B	B	D	D	D	D	D
	150	151	A	A	A	A	B	B	B	B	D	D	D	D	D
	180	181	A	A	A	A	B	B	B	B	D	D	D	D	D
	220	221	A	A	A	A	B	B	B	B	D	D	D	D	D
	270	271	A	A	A	A	B	B	B	B	D	D	D	D	D
	330	331	A	A	A	A	B	B	B	B	D	D	D	D	D
	390	391	A	A	A	A	B	B	B	B	D	D	D	D	D
	470	471	A	A	A	A	B	B	B	B	D	D	D	D	D
	560	561	A	A	A	A	B	B	B	B	D	D	D	D	D
	680	681	A	A	A	A	B	B	B	B	D	D	D	D	D
	820	821	A	A	A	A	B	B	B	B	D	D	D	D	D
	1000	102	A	A	A	A	B	B	B	B	D	D	D	D	D
	1200	122	A	A	A		B	B	B	B	D	D	D	D	D
	1500	152	A	A	A		B	B	B	B	D	D	D	D	D
	1800	182	A	A	A		B	B	B	B	D	D	D	D	D
	2200	222	A	A	A		B	B	B	B	D	D	D	D	D
	2700	272	A	A	A		B	B	B	B	D	D	D	D	D
	3300	332	A	A	A		B	B	B	B	D	D	D	D	D
	3900	392	A	A	A		B	B	B	B	D	D	D	D	D
	4700	472	A	A	A		B	B	B	B	D	D	D	D	D
	5600	562	A	A	A		B	B	B	B	D	D	D	D	D
	6800	682	A				B	B	B	B	D	D	D	D	D
	8200	822	A				B	B	B	B	D	D	D	D	D
	0.010uF	103	A				B	B	B	B	D	D	D	D	D
	0.012	123					B	B	B		D	D	D	D	E
	0.015	153					B	B	B		D	D	D	D	E
	0.018	183					B	B	B		D	D	D	D	E
	0.022	223					B	B	B		D	D	D	D	E
	0.027	273					B	B	B		D	D	D	D	E
	0.033	333					B	B	B		D	D	D	E	E
	0.039	393					B	B	B		D	D	D	E	E
	0.047	473					B	B	B		D	D	D	E	E
	0.056	563					B	B	B		D	D	D	E	
	0.068	683					B	B	B		D	D	D	E	
	0.082	823					B	B	B		D	D	D	E	
	0.10	104					B	B	B		D	D	D	E	
	0.12	124									E	E	E		
	0.15	154									E	E	E	E	
	0.18	184									E	E	E		
	0.22	224									E	E	E	E	
	0.33	334									E	E	E	E	
	0.39	394													
	0.47	474													
	0.56	564													
	0.68	684													
	1.00	105													
	2.20	225													

T-MAX

A	B	C	D	E	F	G	H	I	J	K
0.33mm	0.55mm	0.7mm	0.87mm	0.95mm	1.05mm	1.35mm	1.45mm	1.8mm	2.2mm	2.8mm



DIMENSION (MM)		GMT21 (0805)									GMT31 (1206)									GMT32 (1210)									
RATED VOLTAGE		10	16	25	50	100	200	250	500	630	10	16	25	35	50	100	200	250	500	630	10	16	25	50	100	250	500	1000	
CAPACITANCE RANGE	100 pF	101	E	E	E	E	E	E	E	E							G	G	G	G						G	G	G	
	120	121	E	E	E	E	E	E	E	E	E	E	E	E	E	E	G	G	G	G						G	G	G	
	150	151	E	E	E	E	E	E	E	E	E	E	E	E	E	E	G	G	G	G						G	G	G	
	180	181	E	E	E	E	E	E	E	E	E	E	E	E	E	E	G	G	G	G						G	G	G	
	220	221	E	E	E	E	E	E	E	E	E	E	E	E	E	E	G	G	G	G						G	G	G	
	270	271	E	E	E	E	E	E	E	E	E	E	E	E	E	E	G	G	G	G						G	G	G	
	330	331	E	E	E	E	E	E	E	E	E	E	E	E	E	E	G	G	G	G						G	G	G	
	390	391	E	E	E	E	E	E	E	E	E	E	E	E	E	E	G	G	G	G						G	G	G	
	470	471	E	E	E	E	E	E	E	E	E	E	E	E	E	E	G	G	G	G						G	G	G	
	560	561	E	E	E	E	E	E	E	E	E	E	E	E	E	E	G	G	G	G						G	G	G	
	680	681	E	E	E	E	E	E	E	E	E	E	E	E	E	E	G	G	G	G						F	G	G	
	820	821	E	E	E	E	E	E	E	E	E	E	E	E	E	E	G	G	G	G						F	G	G	
	1000	102	E	E	E	E	E	E	E	E	E	E	E	E	E	E	G	G	G	G	F	F	F	F	F	F	F	G	G
	1200	122	E	E	E	E	E	E	E	E	E	E	E	E	E	E	G	G	G	G	F	F	F	F	F	F	F	G	G
	1500	152	E	E	E	E	E	E	E	E	E	E	E	E	E	E	G	G	G	G	F	F	F	F	F	F	F	G	G
	1800	182	E	E	E	E	E	E	E	E	E	E	E	E	E	E	G	G	G	G	F	F	F	F	F	F	F	G	G
	2200	222	E	E	E	E	E	E	E	E	E	E	E	E	E	E	G	G	G	G	F	F	F	F	F	F	F	G	G
	2700	272	E	E	E	E	E	E	E	E	E	E	E	E	E	E	G	G	G	G	F	F	F	F	F	F	F	G	G
	3300	332	E	E	E	E	E	E	E	E	E	E	E	E	E	E	G	G	G	G	F	F	F	F	F	F	F	G	G
	3900	392	E	E	E	E	E	E	E	E	E	E	E	E	E	E	G	G	G	G	F	F	F	F	F	F	F	G	I
	4700	472	E	E	E	E	E	E	E	E	E	E	E	E	E	E	G	G	G	G	F	F	F	F	F	F	F	G	I
	5600	562	E	E	E	E	E	E	E	E	E	E	E	E	E	E	G	G	G	G	F	F	F	F	F	F	F	G	I
	6800	682	E	E	E	E	E	E	E	E	E	E	E	E	E	E	G	G	G	G	F	F	F	F	F	F	F	G	I
	8200	822	E	E	E	E	E	E	E	E	E	E	E	E	E	E	G	G	G	G	F	F	F	F	F	F	F	G	I
	0.010uF	103	E	E	E	E	E	E	E	E	E	E	E	E	E	E	G	G	G	G	F	F	F	F	F	F	F	G	I
	0.012	123	E	E	E	E	E	E	E	E		E	E	E	E	E	E	G	G		F	F	F	F	F	F	F		
	0.015	153	E	E	E	E	E	E	E	E		E	E	E	E	E	E	G	G		F	F	F	F	F	F	F	G	
	0.018	183	E	E	E	E	E	E	E	E		E	E	E	E	E	E	G	G		F	F	F	F	F	F	F	G	
	0.022	223	E	E	E	E	E	E	E	E		E	E	E	E	E	E	G	G		F	F	F	F	F	F	F	G	
	0.027	273	E	E	E	E	E					E	E	E	E	E	E				F	F	F	F	F	F	F		
	0.033	333	E	E	E	E	E					E	E	E	E	E	E				F	F	F	F	F	F	F		
	0.039	393	E	E	E	E	E					E	E	E	E	E	E				F	F	F	F	F	F	F		
	0.047	473	E	E	E	E	E					E	E	E	E	E	E				F	F	F	F	F	F	G		
	0.056	563	E	E	E	E	E					E	E	E	E	E	E				F	F	F	F	F	F			
	0.068	683	E	E	E	E	E					E	E	E	E	E	E				F	F	F	F	F	F			
	0.082	823	E	E	E	E	E					E	E	E	E	E	E				F	F	F	F	F	F			
	0.10	104	E	E	E	E	E					E	E	E	E	E	E				F	F	F	F	F	F			
	0.12	124	E	E	E	E	E					E	E	E	E	E	E				F	F	F	F	F	F			
	0.15	154	G	G	G	G						F	F	F	F	F	I				F	F	F	F	F				
	0.18	184	G	G	G	G						F	F	F	F	F	I				F	F	F	F	F				
0.22	224	G	G	G	G						F	F	F	F	F	I				F	F	F	F	F					
0.27	274	G	G	G	H						F	F	F	G	G					F	F	F	F						
0.33	334	G	G	G	H						F	F	F	G	G					F	F	F	F	G					
0.39	394	G	G	G	H						F	F	G	J	J					F	F	F	G						
0.47	474	G	G	G	H						G	G	G	I	J					F	F	F	F						
0.56	564	G	G	G							G	G	G	J	J					G	G	G	G						
0.68	684	G	G	G	H						G	G	G	J	J					G	G	G	G						
0.82	824	G	G	G							G	G	G	J	J					G	G	G	G						
1.0	105	G	G	G	H						G	G	G	J	J					G	G	G	G						
1.5	155																				K								
2.2	225												J	J	J						K			L	L				
4.70	475												J											L	L				
10	106												J											L					

I-MAX

A	B	C	D	E	F	G	H	I	J	K	L
0.33mm	0.55mm	0.7mm	0.87mm	0.95mm	1.05mm	1.35mm	1.45mm	1.8mm	1.9mm	2.2mm	2.8mm



Cal-Chip
Electronics Inc.



RELIABILITY TEST CONDITIONS AND DIMENSIONS

NO.	TEST ITEM	TEST CONDITION	REQUIREMENTS																																																									
1.	Pre-and Post-Stress Electrical Test	---																																																										
2.	High Temperature Exposure (Storage) MIL-STD-202 Method 108	- Test temp.: 150±3°C - Unpowered - Test Time: 1000+24/-0 hrs - Measurement to be made after keeping at room temp. for 24±2 hrs.	- No remarkable damage. - Cap Change: NPO: within ±2.5% or ±0.25pF whichever is larger X7R: within ±10.00% -Q/D.F. value: NPO: Cap≥30pF, Q≥1000; Cap<30pF, Q≥400+20C X7R: <table><tr><th>RATED VOL.</th><th>D.F. ≤</th><th>EXCEPTION OF D.F. ≤</th></tr><tr><td rowspan="3">50V</td><td rowspan="3">≤3%</td><td>≤6% 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF</td></tr><tr><td>≤10% 1206≥0.47μF</td></tr><tr><td>≤20% 0603≥1μF; 0805≥1μF; 1206≥0.47μF, 1210≥10μF</td></tr><tr><td rowspan="3">35V</td><td rowspan="3">≤5%</td><td>≤20% 0805≥2.2μF; 1210≥10μF</td></tr><tr><td>≤10% 0805≥1μF; 1210≥10μF</td></tr><tr><td>≤14% 0603≥0.33μF; 1206≥4.7μF</td></tr><tr><td rowspan="3">25V</td><td rowspan="3">≤5%</td><td>≤15% 0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥6.8μF; 1210≥22μF</td></tr><tr><td>≤10% 0603≥1.5μF; 0805≥0.68μF; 1206≥2.2μF, 1210≥4.7μF</td></tr><tr><td>≤15% 0402≥0.033μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF</td></tr><tr><td rowspan="3">16V</td><td rowspan="3">≤5%</td><td>≤15% 0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥2.2μF</td></tr><tr><td>≤20% 0402≥1μF</td></tr><tr><td>≤15% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF</td></tr><tr><td rowspan="3">10V</td><td rowspan="3">≤7.5%</td><td>≤15% 0402≥1μF</td></tr><tr><td>≤20% 0402≥1μF</td></tr><tr><td>≤15% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF</td></tr><tr><td rowspan="3">6.3V</td><td rowspan="3">≤15%</td><td>≤30% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF</td></tr><tr><td>≤20% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF</td></tr><tr><td>≤20% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF</td></tr><tr><td rowspan="3">4V</td><td rowspan="3">≤20%</td><td>---</td></tr><tr><td>---</td></tr><tr><td>---</td></tr></table> CLASS II X7R: <table><tr><th>RATED VOLTAGE</th><th>INSULATION RESISTANCE</th></tr><tr><td>100V: X7R</td><td rowspan="7">1GΩ or RxC≥10 Ω-F whichever is smaller.</td></tr><tr><td>50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF</td></tr><tr><td>35V: 0805≥2.2μF; 1210≥10μF</td></tr><tr><td>25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF</td></tr><tr><td>16V: 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF</td></tr><tr><td>10V: 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF</td></tr><tr><td>6.3V; 4.3;</td></tr></table>	RATED VOL.	D.F. ≤	EXCEPTION OF D.F. ≤	50V	≤3%	≤6% 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF	≤10% 1206≥0.47μF	≤20% 0603≥1μF; 0805≥1μF; 1206≥0.47μF, 1210≥10μF	35V	≤5%	≤20% 0805≥2.2μF; 1210≥10μF	≤10% 0805≥1μF; 1210≥10μF	≤14% 0603≥0.33μF; 1206≥4.7μF	25V	≤5%	≤15% 0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥6.8μF; 1210≥22μF	≤10% 0603≥1.5μF; 0805≥0.68μF; 1206≥2.2μF, 1210≥4.7μF	≤15% 0402≥0.033μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF	16V	≤5%	≤15% 0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥2.2μF	≤20% 0402≥1μF	≤15% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF	10V	≤7.5%	≤15% 0402≥1μF	≤20% 0402≥1μF	≤15% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF	6.3V	≤15%	≤30% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF	≤20% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF	≤20% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF	4V	≤20%	---	---	---	RATED VOLTAGE	INSULATION RESISTANCE	100V: X7R	1GΩ or RxC≥10 Ω-F whichever is smaller.	50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF	35V: 0805≥2.2μF; 1210≥10μF	25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF	16V: 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF	10V: 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF	6.3V; 4.3;									
RATED VOL.	D.F. ≤	EXCEPTION OF D.F. ≤																																																										
50V	≤3%	≤6% 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF																																																										
		≤10% 1206≥0.47μF																																																										
		≤20% 0603≥1μF; 0805≥1μF; 1206≥0.47μF, 1210≥10μF																																																										
35V	≤5%	≤20% 0805≥2.2μF; 1210≥10μF																																																										
		≤10% 0805≥1μF; 1210≥10μF																																																										
		≤14% 0603≥0.33μF; 1206≥4.7μF																																																										
25V	≤5%	≤15% 0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥6.8μF; 1210≥22μF																																																										
		≤10% 0603≥1.5μF; 0805≥0.68μF; 1206≥2.2μF, 1210≥4.7μF																																																										
		≤15% 0402≥0.033μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF																																																										
16V	≤5%	≤15% 0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥2.2μF																																																										
		≤20% 0402≥1μF																																																										
		≤15% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF																																																										
10V	≤7.5%	≤15% 0402≥1μF																																																										
		≤20% 0402≥1μF																																																										
		≤15% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF																																																										
6.3V	≤15%	≤30% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF																																																										
		≤20% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF																																																										
		≤20% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF																																																										
4V	≤20%	---																																																										

RATED VOLTAGE	INSULATION RESISTANCE																																																											
100V: X7R	1GΩ or RxC≥10 Ω-F whichever is smaller.																																																											
50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF																																																												
35V: 0805≥2.2μF; 1210≥10μF																																																												
25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF																																																												
16V: 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF																																																												
10V: 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF																																																												
6.3V; 4.3;																																																												
3.	Destructive Physical Analysis EIA-469	-Per EIA-469	-No defects or abnormalities																																																									
4.	Temperature Cycling JESD22 Method JA-104	- Conduct 1000 cycles according to the temperatures and time. <table><tr><th>STEP</th><th>TEMP. (°C)</th><th>TIME (MIN.)</th></tr><tr><td>1</td><td>-55°C +0/-3</td><td>5±1</td></tr><tr><td>2</td><td>+125°C+3/-0</td><td>5±1</td></tr></table> - Before initial measurement (X7R only): Perform 150+0/-10° for 1 hr and then set for 24±2 hrs at room temp. - Measurement to be made after keeping at room temp for 24±2hrs.	STEP	TEMP. (°C)	TIME (MIN.)	1	-55°C +0/-3	5±1	2	+125°C+3/-0	5±1	- No remarkable damage. - Cap Change: NPO: within ±2.5% or ±0.25pF whichever is larger X7R: within ±10.8 0% -Q/D.F. value: NPO: Cap≥30pF, Q≥1000; Cap<30pF, Q≥400+20C X7R: <table><tr><th>RATED VOL.</th><th>D.F. ≤</th><th>EXCEPTION OF D.F. ≤</th></tr><tr><td rowspan="3">50V</td><td rowspan="3">≤3%</td><td>≤6% 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF</td></tr><tr><td>≤10% 1210≥4.7μF</td></tr><tr><td>≤20% 0603≥1μF; 0805≥1μF; 1206≥4.7μF, 1210≥10μF</td></tr><tr><td rowspan="3">35V</td><td rowspan="3">≤5%</td><td>≤20% 0805≥2.2μF; 1210≥10μF</td></tr><tr><td>≤10% 0805≥1μF; 1210≥10μF</td></tr><tr><td>≤14% 0603≥0.33μF; 1206≥4.7μF</td></tr><tr><td rowspan="3">25V</td><td rowspan="3">≤5%</td><td>≤15% 0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥6.8μF; 1210≥22μF</td></tr><tr><td>≤10% 0603≥1.5μF; 0805≥0.68μF; 1206≥2.2μF, 1210≥4.7μF</td></tr><tr><td>≤15% 0402≥0.033μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF</td></tr><tr><td rowspan="3">16V</td><td rowspan="3">≤5%</td><td>≤15% 0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥2.2μF</td></tr><tr><td>≤20% 0402≥1μF</td></tr><tr><td>≤15% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF</td></tr><tr><td rowspan="3">10V</td><td rowspan="3">≤7.5%</td><td>≤15% 0402≥1μF</td></tr><tr><td>≤20% 0402≥1μF</td></tr><tr><td>≤15% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF</td></tr><tr><td rowspan="3">6.3V</td><td rowspan="3">≤15%</td><td>≤30% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF</td></tr><tr><td>≤20% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF</td></tr><tr><td>≤20% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF</td></tr><tr><td rowspan="3">4V</td><td rowspan="3">≤20%</td><td>---</td></tr><tr><td>---</td></tr><tr><td>---</td></tr></table> CLASS II X7R: <table><tr><th>RATED VOLTAGE</th><th>INSULATION RESISTANCE</th></tr><tr><td>100V: X7R</td><td rowspan="7">1GΩ or RxC≥10 Ω-F whichever is smaller.</td></tr><tr><td>50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF</td></tr><tr><td>35V: 0805≥2.2μF; 1210≥10μF</td></tr><tr><td>25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF</td></tr><tr><td>16V: 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF</td></tr><tr><td>10V: 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF</td></tr><tr><td>6.3V; 4.3;</td></tr></table>	RATED VOL.	D.F. ≤	EXCEPTION OF D.F. ≤	50V	≤3%	≤6% 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF	≤10% 1210≥4.7μF	≤20% 0603≥1μF; 0805≥1μF; 1206≥4.7μF, 1210≥10μF	35V	≤5%	≤20% 0805≥2.2μF; 1210≥10μF	≤10% 0805≥1μF; 1210≥10μF	≤14% 0603≥0.33μF; 1206≥4.7μF	25V	≤5%	≤15% 0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥6.8μF; 1210≥22μF	≤10% 0603≥1.5μF; 0805≥0.68μF; 1206≥2.2μF, 1210≥4.7μF	≤15% 0402≥0.033μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF	16V	≤5%	≤15% 0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥2.2μF	≤20% 0402≥1μF	≤15% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF	10V	≤7.5%	≤15% 0402≥1μF	≤20% 0402≥1μF	≤15% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF	6.3V	≤15%	≤30% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF	≤20% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF	≤20% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF	4V	≤20%	---	---	---	RATED VOLTAGE	INSULATION RESISTANCE	100V: X7R	1GΩ or RxC≥10 Ω-F whichever is smaller.	50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF	35V: 0805≥2.2μF; 1210≥10μF	25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF	16V: 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF	10V: 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF	6.3V; 4.3;
STEP	TEMP. (°C)	TIME (MIN.)																																																										
1	-55°C +0/-3	5±1																																																										
2	+125°C+3/-0	5±1																																																										
RATED VOL.	D.F. ≤	EXCEPTION OF D.F. ≤																																																										
50V	≤3%	≤6% 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF																																																										
		≤10% 1210≥4.7μF																																																										
		≤20% 0603≥1μF; 0805≥1μF; 1206≥4.7μF, 1210≥10μF																																																										
35V	≤5%	≤20% 0805≥2.2μF; 1210≥10μF																																																										
		≤10% 0805≥1μF; 1210≥10μF																																																										
		≤14% 0603≥0.33μF; 1206≥4.7μF																																																										
25V	≤5%	≤15% 0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥6.8μF; 1210≥22μF																																																										
		≤10% 0603≥1.5μF; 0805≥0.68μF; 1206≥2.2μF, 1210≥4.7μF																																																										
		≤15% 0402≥0.033μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF																																																										
16V	≤5%	≤15% 0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥2.2μF																																																										
		≤20% 0402≥1μF																																																										
		≤15% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF																																																										
10V	≤7.5%	≤15% 0402≥1μF																																																										
		≤20% 0402≥1μF																																																										
		≤15% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF																																																										
6.3V	≤15%	≤30% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF																																																										
		≤20% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF																																																										
		≤20% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF																																																										
4V	≤20%	---																																																										

RATED VOLTAGE	INSULATION RESISTANCE																																																											
100V: X7R	1GΩ or RxC≥10 Ω-F whichever is smaller.																																																											
50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF																																																												
35V: 0805≥2.2μF; 1210≥10μF																																																												
25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF																																																												
16V: 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF																																																												
10V: 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF																																																												
6.3V; 4.3;																																																												



RELIABILITY TEST CONDITIONS AND DIMENSIONS

NO.	TEST ITEM	TEST CONDITION	REQUIREMENTS																																																								
5.	Moisture Resistance MIL-STD-202 Method 106	- Test temp.: 25~65°C - Humidity: 80~100% RH - Test Time: 10 cycles, t=24hrs/cycle - Measurement to be made after keeping at room temp. for 24±2 hrs.	- No remarkable damage. - Cap Change: - NPO: within ±3.0% or ±0.30pF whichever is larger - X7R: within ±12.5% -Q/D.F. value: - NPO: More than 30pF, Q≥350; 10pF≤C≤30pF, Q≥275+2.5C - Less than 10pf Q≥200+10C X7R: <table><tr><th>RATED VOL.</th><th>D.F. ≤</th><th>EXCEPTION OF D.F. ≤</th></tr><tr><td rowspan="3">50V</td><td rowspan="3">≤3%</td><td>≤6% 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF</td></tr><tr><td>≤10% 1210≥4.7μF</td></tr><tr><td>≤20% 0603≥1μF; 0805≥1μF; 1206≥4.7μF, 1210≥10μF</td></tr><tr><td rowspan="3">35V</td><td rowspan="3">≤5%</td><td>≤20% 0805≥2.2μF, 1210≥10μF</td></tr><tr><td>≤10% 0805≥1μF; 1210≥10μF</td></tr><tr><td>≤14% 0603≥0.33μF; 1206≥4.7μF</td></tr><tr><td rowspan="3">25V</td><td rowspan="3">≤5%</td><td>≤15% 0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥6.8μF; 1210≥22μF</td></tr><tr><td>≤10% 0603≥.15μF; 0805≥0.68μF; 1206≥2.2μF, 1210≥4.7μF</td></tr><tr><td>≤15% 0402≥0.033μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF</td></tr><tr><td rowspan="3">16V</td><td rowspan="3">≤5%</td><td>≤15% 0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF</td></tr><tr><td>≤20% 0402≥1μF</td></tr><tr><td>≤15% 0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF</td></tr><tr><td rowspan="3">10V</td><td rowspan="3">≤7.5%</td><td>≤15% 0402≥1μF</td></tr><tr><td>≤20% 0402≥1μF</td></tr><tr><td>≤30% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF</td></tr><tr><td>6.3V</td><td>≤15%</td><td>—</td></tr><tr><td>4V</td><td>≤20%</td><td>—</td></tr></table> *I.R.: ≥10GΩ OR RxC≥500Ω-F whichever is smaller. CLASS II X7R: <table><tr><th>RATED VOLTAGE</th><th>INSULATION RESISTANCE</th></tr><tr><td>100V: X7R</td><td rowspan="8">1GΩ or RxC≥10 Ω-F whichever is smaller.</td></tr><tr><td>50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF</td></tr><tr><td>35V: 0805≥2.2μF; 1210≥10μF</td></tr><tr><td>25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF</td></tr><tr><td>16V: 0402≥0.22uF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF</td></tr><tr><td>10V: 0402≥0.47uF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF</td></tr><tr><td>6.3V; 4V</td></tr><tr><td>6.3V; 4V</td></tr></table>	RATED VOL.	D.F. ≤	EXCEPTION OF D.F. ≤	50V	≤3%	≤6% 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF	≤10% 1210≥4.7μF	≤20% 0603≥1μF; 0805≥1μF; 1206≥4.7μF, 1210≥10μF	35V	≤5%	≤20% 0805≥2.2μF, 1210≥10μF	≤10% 0805≥1μF; 1210≥10μF	≤14% 0603≥0.33μF; 1206≥4.7μF	25V	≤5%	≤15% 0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥6.8μF; 1210≥22μF	≤10% 0603≥.15μF; 0805≥0.68μF; 1206≥2.2μF, 1210≥4.7μF	≤15% 0402≥0.033μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF	16V	≤5%	≤15% 0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF	≤20% 0402≥1μF	≤15% 0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF	10V	≤7.5%	≤15% 0402≥1μF	≤20% 0402≥1μF	≤30% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF	6.3V	≤15%	—	4V	≤20%	—	RATED VOLTAGE	INSULATION RESISTANCE	100V: X7R	1GΩ or RxC≥10 Ω-F whichever is smaller.	50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF	35V: 0805≥2.2μF; 1210≥10μF	25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF	16V: 0402≥0.22uF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF	10V: 0402≥0.47uF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF	6.3V; 4V	6.3V; 4V											
RATED VOL.	D.F. ≤	EXCEPTION OF D.F. ≤																																																									
50V	≤3%	≤6% 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF																																																									
		≤10% 1210≥4.7μF																																																									
		≤20% 0603≥1μF; 0805≥1μF; 1206≥4.7μF, 1210≥10μF																																																									
35V	≤5%	≤20% 0805≥2.2μF, 1210≥10μF																																																									
		≤10% 0805≥1μF; 1210≥10μF																																																									
		≤14% 0603≥0.33μF; 1206≥4.7μF																																																									
25V	≤5%	≤15% 0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥6.8μF; 1210≥22μF																																																									
		≤10% 0603≥.15μF; 0805≥0.68μF; 1206≥2.2μF, 1210≥4.7μF																																																									
		≤15% 0402≥0.033μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF																																																									
16V	≤5%	≤15% 0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF																																																									
		≤20% 0402≥1μF																																																									
		≤15% 0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF																																																									
10V	≤7.5%	≤15% 0402≥1μF																																																									
		≤20% 0402≥1μF																																																									
		≤30% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF																																																									
6.3V	≤15%	—																																																									
4V	≤20%	—																																																									
RATED VOLTAGE	INSULATION RESISTANCE																																																										
100V: X7R	1GΩ or RxC≥10 Ω-F whichever is smaller.																																																										
50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF																																																											
35V: 0805≥2.2μF; 1210≥10μF																																																											
25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF																																																											
16V: 0402≥0.22uF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF																																																											
10V: 0402≥0.47uF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF																																																											
6.3V; 4V																																																											
6.3V; 4V																																																											
6.	Biased Humidity MIL-STD-202 Method 103	- Test Temp.: 85±3°C - Humidity: 85%RH - Test Time: 1000+24/-0 hrs - To apply voltage: rated voltage and 1.3~1.5Vdc (add 100k ohm resistor) - Before initial measurement (Class II only): To apply test voltage for 1hr at test temp. and then set 24±2 hrs at room temp. - Measurement to be made after keeping at room temp. for 24±2hrs.	- No remarkable damage. - Cap Change: - NPO: within ±3.0% or ±0.30pF whichever is larger - X7R: within ±12.5% -Q/D.F. value: - NPO: C≥30pF, Q≥200; Cap<30pF, Q≥100+10/3C X7R: <table><tr><th>RATED VOL.</th><th>D.F. ≤</th><th>EXCEPTION OF D.F. ≤</th></tr><tr><td rowspan="3">50V</td><td rowspan="3">≤3%</td><td>≤6% 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF</td></tr><tr><td>≤10% 1210≥4.7uF</td></tr><tr><td>≤20% 0603≥1μF; 0805≥1μF; 1206≥4.7μF, 1210≥10μF</td></tr><tr><td rowspan="3">35V</td><td rowspan="3">≤5%</td><td>≤20% 0805≥2.2μF; 1210≥10μF</td></tr><tr><td>≤10% 0805≥1μF; 1210≥10μF</td></tr><tr><td>≤14% 0603≥0.33μF; 1206≥4.7μF</td></tr><tr><td rowspan="3">25V</td><td rowspan="3">≤5%</td><td>≤15% 0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥6.8μF; 1210≥22μF</td></tr><tr><td>≤10% 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF, 1210≥4.7μF</td></tr><tr><td>≤15% 0402≥0.033μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF</td></tr><tr><td rowspan="3">16V</td><td rowspan="3">≤5%</td><td>≤15% 0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF</td></tr><tr><td>≤20% 0402≥1μF</td></tr><tr><td>≤15% 0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF</td></tr><tr><td rowspan="3">10V</td><td rowspan="3">≤7.5%</td><td>≤15% 0402≥1μF</td></tr><tr><td>≤20% 0402≥1μF</td></tr><tr><td>≤30% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF</td></tr><tr><td>6.3V</td><td>≤15%</td><td>—</td></tr><tr><td>4V</td><td>≤20%</td><td>—</td></tr></table> *I.R.: ≥1GΩ OR RxC≥50Ω-F whichever is smaller. Class II (X7R) for rated voltage test: <table><tr><th>RATED VOLTAGE</th><th>INSULATION RESISTANCE</th></tr><tr><td>100V: X7R</td><td rowspan="8">500MΩ or RxC≥5 Ω-F whichever is smaller.</td></tr><tr><td>50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF</td></tr><tr><td>35V: 0805≥2.2μF; 1210≥10μF</td></tr><tr><td>25V: 0402≥1uF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF</td></tr><tr><td>16V: 0402≥0.22uF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF</td></tr><tr><td>10V: 0402≥0.47uF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF</td></tr><tr><td>6.3V; 4V</td></tr><tr><td>6.3V; 4V</td></tr></table> Class II (X7R) for 1.3~1.5Vdc <table><tr><th>RATED VOLTAGE</th><th>INSULATION RESISTANCE</th></tr><tr><td>100V: X7R</td><td rowspan="8">1GΩ or RxC≥10 Ω-F whichever is smaller.</td></tr><tr><td>50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF</td></tr><tr><td>35V: 0805≥2.2μF; 1210≥10μF</td></tr><tr><td>25V: 0402≥1uF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF</td></tr><tr><td>16V: 0402≥0.22uF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF</td></tr><tr><td>10V: 0402≥0.47uF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF</td></tr><tr><td>6.3V; 4V</td></tr><tr><td>6.3V; 4V</td></tr></table>	RATED VOL.	D.F. ≤	EXCEPTION OF D.F. ≤	50V	≤3%	≤6% 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF	≤10% 1210≥4.7uF	≤20% 0603≥1μF; 0805≥1μF; 1206≥4.7μF, 1210≥10μF	35V	≤5%	≤20% 0805≥2.2μF; 1210≥10μF	≤10% 0805≥1μF; 1210≥10μF	≤14% 0603≥0.33μF; 1206≥4.7μF	25V	≤5%	≤15% 0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥6.8μF; 1210≥22μF	≤10% 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF, 1210≥4.7μF	≤15% 0402≥0.033μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF	16V	≤5%	≤15% 0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF	≤20% 0402≥1μF	≤15% 0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF	10V	≤7.5%	≤15% 0402≥1μF	≤20% 0402≥1μF	≤30% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF	6.3V	≤15%	—	4V	≤20%	—	RATED VOLTAGE	INSULATION RESISTANCE	100V: X7R	500MΩ or RxC≥5 Ω-F whichever is smaller.	50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF	35V: 0805≥2.2μF; 1210≥10μF	25V: 0402≥1uF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF	16V: 0402≥0.22uF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF	10V: 0402≥0.47uF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF	6.3V; 4V	6.3V; 4V	RATED VOLTAGE	INSULATION RESISTANCE	100V: X7R	1GΩ or RxC≥10 Ω-F whichever is smaller.	50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF	35V: 0805≥2.2μF; 1210≥10μF	25V: 0402≥1uF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF	16V: 0402≥0.22uF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF	10V: 0402≥0.47uF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF	6.3V; 4V	6.3V; 4V
RATED VOL.	D.F. ≤	EXCEPTION OF D.F. ≤																																																									
50V	≤3%	≤6% 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF																																																									
		≤10% 1210≥4.7uF																																																									
		≤20% 0603≥1μF; 0805≥1μF; 1206≥4.7μF, 1210≥10μF																																																									
35V	≤5%	≤20% 0805≥2.2μF; 1210≥10μF																																																									
		≤10% 0805≥1μF; 1210≥10μF																																																									
		≤14% 0603≥0.33μF; 1206≥4.7μF																																																									
25V	≤5%	≤15% 0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥6.8μF; 1210≥22μF																																																									
		≤10% 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF, 1210≥4.7μF																																																									
		≤15% 0402≥0.033μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF																																																									
16V	≤5%	≤15% 0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF																																																									
		≤20% 0402≥1μF																																																									
		≤15% 0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF																																																									
10V	≤7.5%	≤15% 0402≥1μF																																																									
		≤20% 0402≥1μF																																																									
		≤30% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF																																																									
6.3V	≤15%	—																																																									
4V	≤20%	—																																																									
RATED VOLTAGE	INSULATION RESISTANCE																																																										
100V: X7R	500MΩ or RxC≥5 Ω-F whichever is smaller.																																																										
50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF																																																											
35V: 0805≥2.2μF; 1210≥10μF																																																											
25V: 0402≥1uF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF																																																											
16V: 0402≥0.22uF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF																																																											
10V: 0402≥0.47uF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF																																																											
6.3V; 4V																																																											
6.3V; 4V																																																											
RATED VOLTAGE	INSULATION RESISTANCE																																																										
100V: X7R	1GΩ or RxC≥10 Ω-F whichever is smaller.																																																										
50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF																																																											
35V: 0805≥2.2μF; 1210≥10μF																																																											
25V: 0402≥1uF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF																																																											
16V: 0402≥0.22uF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF																																																											
10V: 0402≥0.47uF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF																																																											
6.3V; 4V																																																											
6.3V; 4V																																																											





RELIABILITY TEST CONDITIONS AND DIMENSONS

NO.	TEST ITEM	TEST CONDITION	REQUIREMENTS																																												
7.	Operational Life MIL-STD-202 Method 108	- Test temp.: 125±3°C - To apply voltage: full rated voltage - Test time: 1000+24/-0 - Before initial measurement (X7R only): Apply rated voltage for 1 hr at 125°C. Remove and let set for 24+2hrs at room temp. - Measurement to be made after keeping at room temp. for 24±2 hrs.	- No remarkable damage. - Cap Change: NPO: within ±3.0% or ±0.30pF whichever is larger X7R: within ±12.5% -Q/D.F. value: NPO: More than 30pF, Q≥350; 10pF≤C≤30pF, Q≥275+2.5C less than 10pF Q≥200+10C X7R: <table><tr><th>RATED VOL.</th><th>D.F. ≤</th><th>EXCEPTION OF D.F. ≤</th></tr><tr><td rowspan="3">50V</td><td rowspan="3">≤3%</td><td>≤6% 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF</td></tr><tr><td>≤10% 1206≥4.7uF</td></tr><tr><td>≤20% 0603≥1μF; 0805≥1μF;1206≥4.7μF, 1210≥10μF</td></tr><tr><td rowspan="3">35V</td><td rowspan="3">≤5%</td><td>0805≥2.2μF; 1210≥10μF</td></tr><tr><td>≤10% 0805≥1μF; 1210≥10μF</td></tr><tr><td>≤14% 0603≥0.33μF; 1206≥4.7μF</td></tr><tr><td rowspan="3">25V</td><td rowspan="3">≤5%</td><td>0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF;1206≥6.8μF; 1210≥22μF</td></tr><tr><td>≤15%</td></tr><tr><td>≤10% 0603≥0.15μF; 0805≥0.68μF;1206≥2.2μF, 1210≥4.7μF</td></tr><tr><td rowspan="3">16V</td><td rowspan="3">≤5%</td><td>0402≥0.033μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF</td></tr><tr><td>≤15%</td></tr><tr><td>≤10% 0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF</td></tr><tr><td rowspan="3">10V</td><td rowspan="3">≤7.5%</td><td>0402≥1μF</td></tr><tr><td>≤20%</td></tr><tr><td>≤15% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF</td></tr><tr><td>6.3V</td><td>≤15%</td><td>≤30%</td></tr><tr><td>4V</td><td>≤20%</td><td>---</td></tr></table> I.R.: ≥1GΩ OR RxC≥50Ω-F whichever is smaller CLASS II X7R: <table><tr><th>RATED VOLTAGE</th><th>INSULATION RESISTANCE</th></tr><tr><td>100V: X7R</td><td rowspan="7">1GΩ or RxC≥10 Ω-F whichever is smaller.</td></tr><tr><td>50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF</td></tr><tr><td>35V: 0805≥2.2μF; 1210≥10μF</td></tr><tr><td>25V: 0402≥1uF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF</td></tr><tr><td>16V: 0402≥0.22uF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF</td></tr><tr><td>10V: 0402≥0.47uF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF</td></tr><tr><td>6.3V; 4V</td></tr></table>	RATED VOL.	D.F. ≤	EXCEPTION OF D.F. ≤	50V	≤3%	≤6% 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF	≤10% 1206≥4.7uF	≤20% 0603≥1μF; 0805≥1μF;1206≥4.7μF, 1210≥10μF	35V	≤5%	0805≥2.2μF; 1210≥10μF	≤10% 0805≥1μF; 1210≥10μF	≤14% 0603≥0.33μF; 1206≥4.7μF	25V	≤5%	0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF;1206≥6.8μF; 1210≥22μF	≤15%	≤10% 0603≥0.15μF; 0805≥0.68μF;1206≥2.2μF, 1210≥4.7μF	16V	≤5%	0402≥0.033μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF	≤15%	≤10% 0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF	10V	≤7.5%	0402≥1μF	≤20%	≤15% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF	6.3V	≤15%	≤30%	4V	≤20%	---	RATED VOLTAGE	INSULATION RESISTANCE	100V: X7R	1GΩ or RxC≥10 Ω-F whichever is smaller.	50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF	35V: 0805≥2.2μF; 1210≥10μF	25V: 0402≥1uF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF	16V: 0402≥0.22uF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF	10V: 0402≥0.47uF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF	6.3V; 4V
RATED VOL.	D.F. ≤	EXCEPTION OF D.F. ≤																																													
50V	≤3%	≤6% 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF																																													
		≤10% 1206≥4.7uF																																													
		≤20% 0603≥1μF; 0805≥1μF;1206≥4.7μF, 1210≥10μF																																													
35V	≤5%	0805≥2.2μF; 1210≥10μF																																													
		≤10% 0805≥1μF; 1210≥10μF																																													
		≤14% 0603≥0.33μF; 1206≥4.7μF																																													
25V	≤5%	0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF;1206≥6.8μF; 1210≥22μF																																													
		≤15%																																													
		≤10% 0603≥0.15μF; 0805≥0.68μF;1206≥2.2μF, 1210≥4.7μF																																													
16V	≤5%	0402≥0.033μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF																																													
		≤15%																																													
		≤10% 0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF																																													
10V	≤7.5%	0402≥1μF																																													
		≤20%																																													
		≤15% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF																																													
6.3V	≤15%	≤30%																																													
4V	≤20%	---																																													
RATED VOLTAGE	INSULATION RESISTANCE																																														
100V: X7R	1GΩ or RxC≥10 Ω-F whichever is smaller.																																														
50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF																																															
35V: 0805≥2.2μF; 1210≥10μF																																															
25V: 0402≥1uF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF																																															
16V: 0402≥0.22uF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF																																															
10V: 0402≥0.47uF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF																																															
6.3V; 4V																																															
8.	External Visual MIL-STD-202 Method 2009	- Visual inspection	- No remarkable defect.																																												
9.	Physical Dimension JESD22 Method JB-100	- Using by calipers	- Within the specified dimencions																																												
10.	Resistance to Solvents MIL-STD-202 Method 215	- Temperature 25±5°C - Time: 3+0.5/-0 min - Solvent: Iso-propyl alcohol.	- No remarkable damage. - Cap Change: within the specified tolerance. -Q/D.F. value: NPO: Cap≥30pf; Q≥1000; Cap<30pF, Q≥400+20C. X7R: <table><tr><th>RATED VOL.</th><th>D.F. ≤</th><th>EXCEPTION OF D.F. ≤</th></tr><tr><td rowspan="3">50V</td><td rowspan="3">≤2.5%</td><td>≤3% 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF</td></tr><tr><td>≤5% 1206≥4.7uF</td></tr><tr><td>≤10% 0603≥1μF; 0805≥1μF;1206≥4.7μF, 1210≥10μF</td></tr><tr><td rowspan="3">35V</td><td rowspan="3">≤3.5%</td><td>0805≥2.2μF; 1210≥10μF</td></tr><tr><td>≤5 0805≥1μF; 1210≥10μF</td></tr><tr><td>≤7% 0603≥0.33μF; 1206≥4.7μF</td></tr><tr><td rowspan="3">25V</td><td rowspan="3">≤3.5%</td><td>0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF;1206≥6.8μF; 1210≥22μF</td></tr><tr><td>≤10%</td></tr><tr><td>≤5% 0402≥0.033μF; 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF</td></tr><tr><td rowspan="3">16V</td><td rowspan="3">≤3.5%</td><td>0402≥0.22μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF</td></tr><tr><td>≤10%</td></tr><tr><td>≤10% 0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF</td></tr><tr><td rowspan="3">10V</td><td rowspan="3">≤5%</td><td>0402≥1μF</td></tr><tr><td>≤15%</td></tr><tr><td>≤10% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF</td></tr><tr><td>6.3V</td><td>≤10%</td><td>≤20%</td></tr><tr><td>4V</td><td>≤15%</td><td>---</td></tr></table> I.R.: ≥10GΩ OR RxC≥500Ω-F whichever is smaller CLASS II X7R: <table><tr><th>RATED VOLTAGE</th><th>INSULATION RESISTANCE</th></tr><tr><td>100V: X7R</td><td rowspan="7">10GΩ or RxC≥100 Ω-F whichever is smaller.</td></tr><tr><td>50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF</td></tr><tr><td>35V: 0805≥2.2μF; 1210≥10μF</td></tr><tr><td>25V: 0402≥1uF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF</td></tr><tr><td>16V: 0402≥0.22uF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF</td></tr><tr><td>10V: 0402≥0.47uF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF</td></tr><tr><td>6.3V; 4V</td></tr></table>	RATED VOL.	D.F. ≤	EXCEPTION OF D.F. ≤	50V	≤2.5%	≤3% 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF	≤5% 1206≥4.7uF	≤10% 0603≥1μF; 0805≥1μF;1206≥4.7μF, 1210≥10μF	35V	≤3.5%	0805≥2.2μF; 1210≥10μF	≤5 0805≥1μF; 1210≥10μF	≤7% 0603≥0.33μF; 1206≥4.7μF	25V	≤3.5%	0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF;1206≥6.8μF; 1210≥22μF	≤10%	≤5% 0402≥0.033μF; 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF	16V	≤3.5%	0402≥0.22μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF	≤10%	≤10% 0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF	10V	≤5%	0402≥1μF	≤15%	≤10% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF	6.3V	≤10%	≤20%	4V	≤15%	---	RATED VOLTAGE	INSULATION RESISTANCE	100V: X7R	10GΩ or RxC≥100 Ω-F whichever is smaller.	50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF	35V: 0805≥2.2μF; 1210≥10μF	25V: 0402≥1uF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF	16V: 0402≥0.22uF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF	10V: 0402≥0.47uF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF	6.3V; 4V
RATED VOL.	D.F. ≤	EXCEPTION OF D.F. ≤																																													
50V	≤2.5%	≤3% 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF																																													
		≤5% 1206≥4.7uF																																													
		≤10% 0603≥1μF; 0805≥1μF;1206≥4.7μF, 1210≥10μF																																													
35V	≤3.5%	0805≥2.2μF; 1210≥10μF																																													
		≤5 0805≥1μF; 1210≥10μF																																													
		≤7% 0603≥0.33μF; 1206≥4.7μF																																													
25V	≤3.5%	0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF;1206≥6.8μF; 1210≥22μF																																													
		≤10%																																													
		≤5% 0402≥0.033μF; 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF																																													
16V	≤3.5%	0402≥0.22μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF																																													
		≤10%																																													
		≤10% 0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF																																													
10V	≤5%	0402≥1μF																																													
		≤15%																																													
		≤10% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF																																													
6.3V	≤10%	≤20%																																													
4V	≤15%	---																																													
RATED VOLTAGE	INSULATION RESISTANCE																																														
100V: X7R	10GΩ or RxC≥100 Ω-F whichever is smaller.																																														
50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF																																															
35V: 0805≥2.2μF; 1210≥10μF																																															
25V: 0402≥1uF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF																																															
16V: 0402≥0.22uF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF																																															
10V: 0402≥0.47uF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF																																															
6.3V; 4V																																															



RELIABILITY TEST CONDITIONS AND DIMENSIONS

NO.	TEST ITEM	TEST CONDITION	REQUIREMENTS																																														
11.	Mechanical Shock MIL-STD-202 Method 213	- Peak value: 1500g's - Wave: 1/2 sine. - Veolicy: 15.4ft/sec - Three shocks in each direction should be applied along 3 mutually perpendicular axes of the test specimen (18 shocks)	- No remarkable damage. - Cap.: within the specified tolerance -Q/D.F. value: NPO: Cap30pF, Q≥1000; Cap<30pF, Q≥400+20C X7R: <table><thead><tr><th>RATED VOL.</th><th>D.F. ≤</th><th>EXCEPTION OF D.F. ≤</th></tr></thead><tbody><tr><td rowspan="3">50V</td><td rowspan="3">≤2.5%</td><td>≤3% 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF</td></tr><tr><td>≤5% 1206≥4.7uF</td></tr><tr><td>≤10% 0603≥1μF; 0805≥1μF;1206≥4.7μF; 1210≥10μF</td></tr><tr><td rowspan="3">35V</td><td rowspan="3">≤3.5%</td><td>≤10% 0805≥2.2μF; 1210≥10μF</td></tr><tr><td>≤5% 0805≥1μF; 1210≥10μF</td></tr><tr><td>≤7% 0603≥0.33μF; 1206≥4.7μF</td></tr><tr><td rowspan="3">25V</td><td rowspan="3">≤3.5%</td><td>0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF;1206≥6.8μF; 1210≥22μF</td></tr><tr><td>≤5% 0402≥0.033μF; 0603≥0.15μF; 0805≥0.68μF;1206≥2.2μF; 1210≥4.7μF</td></tr><tr><td>≤10% 0402≥0.22μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF</td></tr><tr><td rowspan="3">16V</td><td rowspan="3">≤3.5%</td><td>0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF</td></tr><tr><td>≤5% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF</td></tr><tr><td>≤15% 0402≥1μF</td></tr><tr><td rowspan="3">10V</td><td rowspan="3">≤5%</td><td>0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF</td></tr><tr><td>≤10% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF</td></tr><tr><td>≤15% 0402≥1μF</td></tr><tr><td rowspan="3">6.3V</td><td rowspan="3">≤10%</td><td>0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF</td></tr><tr><td>≤15% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF</td></tr><tr><td>≤20% 0402≥2.2μF</td></tr><tr><td>4V</td><td>≤15%</td><td>— —</td></tr></tbody></table> *I.R.: ≥10GΩ OR RxC≥500Ω-F whichever is smaller. CLASS II X7R: <table><thead><tr><th>RATED VOLTAGE</th><th>INSULATION RESISTANCE</th></tr></thead><tbody><tr><td>100V: X7R</td><td rowspan="7">10GΩ or RxC≥100 Ω-F whichever is smaller.</td></tr><tr><td>50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF</td></tr><tr><td>35V: 0805≥2.2μF; 1210≥10μF</td></tr><tr><td>25V: 0402≥1uF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF</td></tr><tr><td>16V: 0402≥0.22uF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF</td></tr><tr><td>10V: 0402≥0.47uF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF</td></tr><tr><td>6.3V; 4V</td></tr></tbody></table>	RATED VOL.	D.F. ≤	EXCEPTION OF D.F. ≤	50V	≤2.5%	≤3% 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF	≤5% 1206≥4.7uF	≤10% 0603≥1μF; 0805≥1μF;1206≥4.7μF; 1210≥10μF	35V	≤3.5%	≤10% 0805≥2.2μF; 1210≥10μF	≤5% 0805≥1μF; 1210≥10μF	≤7% 0603≥0.33μF; 1206≥4.7μF	25V	≤3.5%	0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF;1206≥6.8μF; 1210≥22μF	≤5% 0402≥0.033μF; 0603≥0.15μF; 0805≥0.68μF;1206≥2.2μF; 1210≥4.7μF	≤10% 0402≥0.22μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF	16V	≤3.5%	0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF	≤5% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF	≤15% 0402≥1μF	10V	≤5%	0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF	≤10% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF	≤15% 0402≥1μF	6.3V	≤10%	0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF	≤15% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF	≤20% 0402≥2.2μF	4V	≤15%	— —	RATED VOLTAGE	INSULATION RESISTANCE	100V: X7R	10GΩ or RxC≥100 Ω-F whichever is smaller.	50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF	35V: 0805≥2.2μF; 1210≥10μF	25V: 0402≥1uF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF	16V: 0402≥0.22uF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF	10V: 0402≥0.47uF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF	6.3V; 4V
RATED VOL.	D.F. ≤	EXCEPTION OF D.F. ≤																																															
50V	≤2.5%	≤3% 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF																																															
		≤5% 1206≥4.7uF																																															
		≤10% 0603≥1μF; 0805≥1μF;1206≥4.7μF; 1210≥10μF																																															
35V	≤3.5%	≤10% 0805≥2.2μF; 1210≥10μF																																															
		≤5% 0805≥1μF; 1210≥10μF																																															
		≤7% 0603≥0.33μF; 1206≥4.7μF																																															
25V	≤3.5%	0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF;1206≥6.8μF; 1210≥22μF																																															
		≤5% 0402≥0.033μF; 0603≥0.15μF; 0805≥0.68μF;1206≥2.2μF; 1210≥4.7μF																																															
		≤10% 0402≥0.22μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF																																															
16V	≤3.5%	0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF																																															
		≤5% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF																																															
		≤15% 0402≥1μF																																															
10V	≤5%	0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF																																															
		≤10% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF																																															
		≤15% 0402≥1μF																																															
6.3V	≤10%	0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF																																															
		≤15% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF																																															
		≤20% 0402≥2.2μF																																															
4V	≤15%	— —																																															
RATED VOLTAGE	INSULATION RESISTANCE																																																
100V: X7R	10GΩ or RxC≥100 Ω-F whichever is smaller.																																																
50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF																																																	
35V: 0805≥2.2μF; 1210≥10μF																																																	
25V: 0402≥1uF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF																																																	
16V: 0402≥0.22uF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF																																																	
10V: 0402≥0.47uF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF																																																	
6.3V; 4V																																																	
12.	Vibration MIL-STD-202 Method 204	- Vibration frequency: 10~2000 Hz/min. (5g's for 20 min) - Total Amplitude: 1.5mm - 12 cycles each of 3 orientations (36 times)	- No remarkable damage. - Cap Change: within the specified tolerance -Q/D.F. value: NPO: C≥30pF, Q≥1000; Cap<30pF, Q≥400+20C X7R: <table><thead><tr><th>RATED VOL.</th><th>D.F. ≤</th><th>EXCEPTION OF D.F. ≤</th></tr></thead><tbody><tr><td rowspan="3">≥50V</td><td rowspan="3">≤2.5%</td><td>≤3% 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF</td></tr><tr><td>≤5% 1206≥4.7uF</td></tr><tr><td>≤10% 0603≥1μF; 0805≥1μF;1206≥4.7μF; 1210≥10μF</td></tr><tr><td rowspan="3">35V</td><td rowspan="3">≤3.5%</td><td>≤10% 0805≥2.2μF; 1210≥10μF</td></tr><tr><td>≤5% 0805≥1μF; 1210≥10μF</td></tr><tr><td>≤7% 0603≥0.33μF; 1206≥4.7μF</td></tr><tr><td rowspan="3">25V</td><td rowspan="3">≤3.5%</td><td>0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF;1206≥6.8μF; 1210≥22μF</td></tr><tr><td>≤5% 0402≥0.033μF; 0603≥0.15μF; 0805≥0.68μF;1206≥2.2μF; 1210≥4.7μF</td></tr><tr><td>≤10% 0402≥0.22μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF</td></tr><tr><td rowspan="3">16V</td><td rowspan="3">≤3.5%</td><td>0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF</td></tr><tr><td>≤5% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF</td></tr><tr><td>≤15% 0402≥1μF</td></tr><tr><td rowspan="3">10V</td><td rowspan="3">≤5%</td><td>0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF</td></tr><tr><td>≤10% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF</td></tr><tr><td>≤15% 0402≥1μF</td></tr><tr><td rowspan="3">6.3V</td><td rowspan="3">≤10%</td><td>0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF</td></tr><tr><td>≤15% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF</td></tr><tr><td>≤20% 0402≥2.2μF</td></tr><tr><td>4V</td><td>≤15%</td><td>— —</td></tr></tbody></table> *I.R.: ≥1GΩ OR RxC≥50Ω-F whichever is smaller. Class II (X7R) for rated voltage test: <table><thead><tr><th>RATED VOLTAGE</th><th>INSULATION RESISTANCE</th></tr></thead><tbody><tr><td>100V: X7R</td><td rowspan="7">10MΩ or RxC≥100 Ω-F whichever is smaller.</td></tr><tr><td>50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF</td></tr><tr><td>35V: 0805≥2.2μF; 1210≥10μF</td></tr><tr><td>25V: 0402≥1uF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF</td></tr><tr><td>16V: 0402≥0.22uF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF</td></tr><tr><td>10V: 0402≥0.47uF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF</td></tr><tr><td>6.3V; 4V</td></tr></tbody></table>	RATED VOL.	D.F. ≤	EXCEPTION OF D.F. ≤	≥50V	≤2.5%	≤3% 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF	≤5% 1206≥4.7uF	≤10% 0603≥1μF; 0805≥1μF;1206≥4.7μF; 1210≥10μF	35V	≤3.5%	≤10% 0805≥2.2μF; 1210≥10μF	≤5% 0805≥1μF; 1210≥10μF	≤7% 0603≥0.33μF; 1206≥4.7μF	25V	≤3.5%	0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF;1206≥6.8μF; 1210≥22μF	≤5% 0402≥0.033μF; 0603≥0.15μF; 0805≥0.68μF;1206≥2.2μF; 1210≥4.7μF	≤10% 0402≥0.22μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF	16V	≤3.5%	0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF	≤5% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF	≤15% 0402≥1μF	10V	≤5%	0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF	≤10% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF	≤15% 0402≥1μF	6.3V	≤10%	0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF	≤15% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF	≤20% 0402≥2.2μF	4V	≤15%	— —	RATED VOLTAGE	INSULATION RESISTANCE	100V: X7R	10MΩ or RxC≥100 Ω-F whichever is smaller.	50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF	35V: 0805≥2.2μF; 1210≥10μF	25V: 0402≥1uF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF	16V: 0402≥0.22uF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF	10V: 0402≥0.47uF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF	6.3V; 4V
RATED VOL.	D.F. ≤	EXCEPTION OF D.F. ≤																																															
≥50V	≤2.5%	≤3% 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF																																															
		≤5% 1206≥4.7uF																																															
		≤10% 0603≥1μF; 0805≥1μF;1206≥4.7μF; 1210≥10μF																																															
35V	≤3.5%	≤10% 0805≥2.2μF; 1210≥10μF																																															
		≤5% 0805≥1μF; 1210≥10μF																																															
		≤7% 0603≥0.33μF; 1206≥4.7μF																																															
25V	≤3.5%	0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF;1206≥6.8μF; 1210≥22μF																																															
		≤5% 0402≥0.033μF; 0603≥0.15μF; 0805≥0.68μF;1206≥2.2μF; 1210≥4.7μF																																															
		≤10% 0402≥0.22μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF																																															
16V	≤3.5%	0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF																																															
		≤5% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF																																															
		≤15% 0402≥1μF																																															
10V	≤5%	0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF																																															
		≤10% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF																																															
		≤15% 0402≥1μF																																															
6.3V	≤10%	0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF																																															
		≤15% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF																																															
		≤20% 0402≥2.2μF																																															
4V	≤15%	— —																																															
RATED VOLTAGE	INSULATION RESISTANCE																																																
100V: X7R	10MΩ or RxC≥100 Ω-F whichever is smaller.																																																
50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF																																																	
35V: 0805≥2.2μF; 1210≥10μF																																																	
25V: 0402≥1uF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF																																																	
16V: 0402≥0.22uF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF																																																	
10V: 0402≥0.47uF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF																																																	
6.3V; 4V																																																	



RELIABILITY TEST CONDITIONS AND DIMENSIONS

NO.	TEST ITEM	TEST CONDITION	REQUIREMENTS																																																			
13.	Resistance to Soldering Heat MIL-STD-202 Method 210	- Solder temperature: 270±5°C - Dipping time: 10±1 sec - Before initial measurement (X7R only): perform 150+0/-10°C for 1 hr and then set 24±2 hrs at room temp. - Measurement to be made after keeping at room temp. for 24±2 hrs.	- No remarkable damage. - Cap change: NPO: within ±2.5% or 0.25pF whichever is larger X7R: within 7.5% -Q/D.F. value: NPO: Cap≥30pF, Q≥1000; Cap<30pF, Q≥400+20C X7R:<table><tr><th>RATED VOL.</th><th>D.F. ≤</th><th>EXCEPTION OF D.F. ≤</th></tr><tr><td rowspan="2">≥50V</td><td>≤3%</td><td>0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF</td></tr><tr><td>≤5%</td><td>1210≥4.7uF</td></tr><tr><td rowspan="2">35V</td><td>≤10%</td><td>0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥10μF</td></tr><tr><td>≤3.5%</td><td>0805≥2.2μF; 1210≥10μF</td></tr><tr><td rowspan="3">25V</td><td>≤5%</td><td>0805≥1μF; 1210≥10μF</td></tr><tr><td>≤7%</td><td>0603≥0.33μF; 1206≥4.7μF</td></tr><tr><td>≤10%</td><td>0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥6.8μF; 1210≥22μF</td></tr><tr><td rowspan="2">16V</td><td rowspan="2">≤3.5%</td><td>≤5% 0402≥0.033μF; 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF, 1210≥4.7μF</td></tr><tr><td>≤10% 0402≥0.22μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF</td></tr><tr><td rowspan="2">10V</td><td rowspan="2">≤5%</td><td>≤10% 0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF</td></tr><tr><td>≤15% 0402≥1μF</td></tr><tr><td rowspan="2">6.3V</td><td rowspan="2">≤10%</td><td>≤15% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF</td></tr><tr><td>≤20% 0402≥2.2μF</td></tr><tr><td>4V</td><td>≤15%</td><td>— —</td></tr></table> *I.R.: ≥10GΩ OR RxC≥500Ω·F whichever is smaller. CLASS II X7R:<table><tr><th>RATED VOLTAGE</th><th>INSULATION RESISTANCE</th></tr><tr><td>100V: X7R</td><td rowspan="7">10GΩ or RxC≥100 Ω·F whichever is smaller.</td></tr><tr><td>50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF</td></tr><tr><td>35V: 0805≥2.2μF; 1210≥10μF</td></tr><tr><td>25V: 0402≥1uF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF</td></tr><tr><td>16V: 0402≥0.22uF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF</td></tr><tr><td>10V: 0402≥0.47uF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF</td></tr><tr><td>6.3V; 4V</td></tr></table>	RATED VOL.	D.F. ≤	EXCEPTION OF D.F. ≤	≥50V	≤3%	0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF	≤5%	1210≥4.7uF	35V	≤10%	0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥10μF	≤3.5%	0805≥2.2μF; 1210≥10μF	25V	≤5%	0805≥1μF; 1210≥10μF	≤7%	0603≥0.33μF; 1206≥4.7μF	≤10%	0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥6.8μF; 1210≥22μF	16V	≤3.5%	≤5% 0402≥0.033μF; 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF, 1210≥4.7μF	≤10% 0402≥0.22μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF	10V	≤5%	≤10% 0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF	≤15% 0402≥1μF	6.3V	≤10%	≤15% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF	≤20% 0402≥2.2μF	4V	≤15%	— —	RATED VOLTAGE	INSULATION RESISTANCE	100V: X7R	10GΩ or RxC≥100 Ω·F whichever is smaller.	50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF	35V: 0805≥2.2μF; 1210≥10μF	25V: 0402≥1uF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF	16V: 0402≥0.22uF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF	10V: 0402≥0.47uF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF	6.3V; 4V						
RATED VOL.	D.F. ≤	EXCEPTION OF D.F. ≤																																																				
≥50V	≤3%	0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF																																																				
	≤5%	1210≥4.7uF																																																				
35V	≤10%	0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥10μF																																																				
	≤3.5%	0805≥2.2μF; 1210≥10μF																																																				
25V	≤5%	0805≥1μF; 1210≥10μF																																																				
	≤7%	0603≥0.33μF; 1206≥4.7μF																																																				
	≤10%	0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥6.8μF; 1210≥22μF																																																				
16V	≤3.5%	≤5% 0402≥0.033μF; 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF, 1210≥4.7μF																																																				
		≤10% 0402≥0.22μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF																																																				
10V	≤5%	≤10% 0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF																																																				
		≤15% 0402≥1μF																																																				
6.3V	≤10%	≤15% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF																																																				
		≤20% 0402≥2.2μF																																																				
4V	≤15%	— —																																																				
RATED VOLTAGE	INSULATION RESISTANCE																																																					
100V: X7R	10GΩ or RxC≥100 Ω·F whichever is smaller.																																																					
50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF																																																						
35V: 0805≥2.2μF; 1210≥10μF																																																						
25V: 0402≥1uF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF																																																						
16V: 0402≥0.22uF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF																																																						
10V: 0402≥0.47uF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF																																																						
6.3V; 4V																																																						
14.	Thermal Shock MIL-STD-202 Method 107	- Conduct 300 cycles according to the temperatures and time. <table><tr><th>STEP</th><th>TEMP. (°C)</th><th>TIME (MIN.)</th></tr><tr><td>1</td><td>-55°C +0/-3</td><td>15±3</td></tr><tr><td>2</td><td>+125°C +3/-0</td><td>15±3</td></tr></table> - Max. transfer time: 20 sec. - Before initial measurement (X7R only): perform 150+0/-10°C for 1 hr and then set for 24±2 hrs at room temp. - Measurement to be made after keeping at room temp for 24±2 hrs.	STEP	TEMP. (°C)	TIME (MIN.)	1	-55°C +0/-3	15±3	2	+125°C +3/-0	15±3	- No remarkable damage. - Cap change: NPO: within ±2.5% or 0.25pF whichever is larger X7R: within 10.0% -Q/D.F. value: NPO: Cap≥30pF, Q≥1000; Cap<30pF, Q≥400+20C X7R:<table><tr><th>RATED VOL.</th><th>D.F. ≤</th><th>EXCEPTION OF D.F. ≤</th></tr><tr><td rowspan="3">≥50V</td><td>≤3%</td><td>≤6% 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF</td></tr><tr><td rowspan="2">≤10%</td><td>1210≥4.7uF</td></tr><tr><td>0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥10μF</td></tr><tr><td rowspan="3">35V</td><td rowspan="2">≤5%</td><td>0805≥2.2μF; 1210≥10μF</td></tr><tr><td>≤10% 0805≥1μF; 1210≥10μF</td></tr><tr><td>≤14%</td><td>0603≥0.33μF; 1206≥4.7μF</td></tr><tr><td rowspan="3">25V</td><td rowspan="3">≤5%</td><td>≤15% 0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥6.8μF; 1210≥22μF</td></tr><tr><td>≤10% 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF, 1210≥4.7μF</td></tr><tr><td>≤15% 0402≥0.033μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF</td></tr><tr><td rowspan="3">16V</td><td rowspan="3">≤5%</td><td>≤15% 0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF</td></tr><tr><td>≤20% 0402≥1μF</td></tr><tr><td>≤7.5%</td><td>≤15% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF</td></tr><tr><td>6.3V</td><td>≤15%</td><td>≤30% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF</td></tr><tr><td>4V</td><td>≤20%</td><td>— —</td></tr></table> *I.R.: ≥1GΩ OR RxC≥50Ω·F whichever is smaller. Class II (X7R) for rated voltage test<table><tr><th>RATED VOLTAGE</th><th>INSULATION RESISTANCE</th></tr><tr><td>100V: X7R</td><td rowspan="7">10GΩ or RxC≥10 Ω·F whichever is smaller.</td></tr><tr><td>50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF</td></tr><tr><td>35V: 0805≥2.2μF; 1210≥10μF</td></tr><tr><td>25V: 0402≥1uF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF</td></tr><tr><td>16V: 0402≥0.22uF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF</td></tr><tr><td>10V: 0402≥0.47uF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF</td></tr><tr><td>6.3V; 4V</td></tr></table>	RATED VOL.	D.F. ≤	EXCEPTION OF D.F. ≤	≥50V	≤3%	≤6% 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF	≤10%	1210≥4.7uF	0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥10μF	35V	≤5%	0805≥2.2μF; 1210≥10μF	≤10% 0805≥1μF; 1210≥10μF	≤14%	0603≥0.33μF; 1206≥4.7μF	25V	≤5%	≤15% 0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥6.8μF; 1210≥22μF	≤10% 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF, 1210≥4.7μF	≤15% 0402≥0.033μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF	16V	≤5%	≤15% 0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF	≤20% 0402≥1μF	≤7.5%	≤15% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF	6.3V	≤15%	≤30% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF	4V	≤20%	— —	RATED VOLTAGE	INSULATION RESISTANCE	100V: X7R	10GΩ or RxC≥10 Ω·F whichever is smaller.	50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF	35V: 0805≥2.2μF; 1210≥10μF	25V: 0402≥1uF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF	16V: 0402≥0.22uF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF	10V: 0402≥0.47uF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF	6.3V; 4V
STEP	TEMP. (°C)	TIME (MIN.)																																																				
1	-55°C +0/-3	15±3																																																				
2	+125°C +3/-0	15±3																																																				
RATED VOL.	D.F. ≤	EXCEPTION OF D.F. ≤																																																				
≥50V	≤3%	≤6% 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF																																																				
	≤10%	1210≥4.7uF																																																				
		0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥10μF																																																				
35V	≤5%	0805≥2.2μF; 1210≥10μF																																																				
		≤10% 0805≥1μF; 1210≥10μF																																																				
	≤14%	0603≥0.33μF; 1206≥4.7μF																																																				
25V	≤5%	≤15% 0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥6.8μF; 1210≥22μF																																																				
		≤10% 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF, 1210≥4.7μF																																																				
		≤15% 0402≥0.033μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF																																																				
16V	≤5%	≤15% 0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF																																																				
		≤20% 0402≥1μF																																																				
		≤7.5%	≤15% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF																																																			
6.3V	≤15%	≤30% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF																																																				
4V	≤20%	— —																																																				
RATED VOLTAGE	INSULATION RESISTANCE																																																					
100V: X7R	10GΩ or RxC≥10 Ω·F whichever is smaller.																																																					
50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF																																																						
35V: 0805≥2.2μF; 1210≥10μF																																																						
25V: 0402≥1uF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF																																																						
16V: 0402≥0.22uF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF																																																						
10V: 0402≥0.47uF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF																																																						
6.3V; 4V																																																						



RELIABILITY TEST CONDITIONS AND DIMENSIONS


NO.	TEST ITEM	TEST CONDITION	REQUIREMENTS																																												
15.	ESD AEC-Q200-002	- Per AEC-Q200-002	- No remarkable damage. - Cap change: within the specified tolerance. - Q/D.F. value: NPO: Cap≥30pF, Q≥1000; Cap<30pF, Q≥400+20C X7R: <table><tr><th>RATED VOL.</th><th>D.F. ≤</th><th>EXCEPTION OF D.F. ≤</th></tr><tr><td rowspan="2">≥50V</td><td rowspan="2">≤2.5%</td><td>≤3% 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF</td></tr><tr><td>≤5% 1210≥4.7μF</td></tr><tr><td rowspan="2">35V</td><td rowspan="2">≤3.5%</td><td>≤10% 0603≥1μF; 0805≥1μF; 1206≥4.7μF, 1210≥10μF</td></tr><tr><td>≤5% 0805≥2.2μF; 1210≥10μF</td></tr><tr><td rowspan="2">25V</td><td rowspan="2">≤3.5%</td><td>≤5% 0805≥1μF; 1210≥10μF</td></tr><tr><td>≤7% 0603≥0.33μF; 1206≥4.7μF</td></tr><tr><td rowspan="2"></td><td rowspan="2"></td><td>≤10% 0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥6.8μF; 1210≥22μF</td></tr><tr><td></td></tr><tr><td rowspan="2">16V</td><td rowspan="2">≤3.5%</td><td>≤5% 0402≥0.033μF; 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF, 1210≥4.7μF</td></tr><tr><td>≤10% 0402≥0.22μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF</td></tr><tr><td rowspan="2">10V</td><td rowspan="2">≤5%</td><td>≤10% 0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF</td></tr><tr><td>≤15% 0402≥1μF</td></tr><tr><td rowspan="2">6.3V</td><td rowspan="2">≤10%</td><td>≤15% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF</td></tr><tr><td>≤20% 0402≥2.2μF</td></tr><tr><td>4V</td><td>≤15%</td><td>— —</td></tr></table> *I.R.: ≥10GΩ OR RxC≥500Ω·F whichever is smaller. Class II (X7R) <table><tr><th>RATED VOLTAGE</th><th>INSULATION RESISTANCE</th></tr><tr><td>100V: X7R</td><td rowspan="7">10GΩ or RxC≥100 Ω·F whichever is smaller.</td></tr><tr><td>50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF</td></tr><tr><td>35V: 0805≥2.2μF; 1210≥10μF</td></tr><tr><td>25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF</td></tr><tr><td>16V: 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF</td></tr><tr><td>10V: 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF</td></tr><tr><td>6.3V; 4V</td></tr></table>	RATED VOL.	D.F. ≤	EXCEPTION OF D.F. ≤	≥50V	≤2.5%	≤3% 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF	≤5% 1210≥4.7μF	35V	≤3.5%	≤10% 0603≥1μF; 0805≥1μF; 1206≥4.7μF, 1210≥10μF	≤5% 0805≥2.2μF; 1210≥10μF	25V	≤3.5%	≤5% 0805≥1μF; 1210≥10μF	≤7% 0603≥0.33μF; 1206≥4.7μF			≤10% 0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥6.8μF; 1210≥22μF		16V	≤3.5%	≤5% 0402≥0.033μF; 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF, 1210≥4.7μF	≤10% 0402≥0.22μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF	10V	≤5%	≤10% 0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF	≤15% 0402≥1μF	6.3V	≤10%	≤15% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF	≤20% 0402≥2.2μF	4V	≤15%	— —	RATED VOLTAGE	INSULATION RESISTANCE	100V: X7R	10GΩ or RxC≥100 Ω·F whichever is smaller.	50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF	35V: 0805≥2.2μF; 1210≥10μF	25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF	16V: 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF	10V: 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF	6.3V; 4V
RATED VOL.	D.F. ≤	EXCEPTION OF D.F. ≤																																													
≥50V	≤2.5%	≤3% 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF																																													
		≤5% 1210≥4.7μF																																													
35V	≤3.5%	≤10% 0603≥1μF; 0805≥1μF; 1206≥4.7μF, 1210≥10μF																																													
		≤5% 0805≥2.2μF; 1210≥10μF																																													
25V	≤3.5%	≤5% 0805≥1μF; 1210≥10μF																																													
		≤7% 0603≥0.33μF; 1206≥4.7μF																																													
		≤10% 0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥6.8μF; 1210≥22μF																																													
16V	≤3.5%	≤5% 0402≥0.033μF; 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF, 1210≥4.7μF																																													
		≤10% 0402≥0.22μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF																																													
10V	≤5%	≤10% 0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF																																													
		≤15% 0402≥1μF																																													
6.3V	≤10%	≤15% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF																																													
		≤20% 0402≥2.2μF																																													
4V	≤15%	— —																																													
RATED VOLTAGE	INSULATION RESISTANCE																																														
100V: X7R	10GΩ or RxC≥100 Ω·F whichever is smaller.																																														
50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF																																															
35V: 0805≥2.2μF; 1210≥10μF																																															
25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF																																															
16V: 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF																																															
10V: 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF																																															
6.3V; 4V																																															
16.	Solderability J-STD-002 JESD22-B102E	- Condition A Un-mounted chips 4hrs / 155°C Dry then completely immersed for 5±0.5 sec in solder bath at 245±5°C. - Condition B Un-mounted chips steam 8 hrs then completely immersed for 10±1 sec in solder bath at 220+5/-0°C - Condition C Un-mounted chips steam 8 hrs then completely immersed for 10±1 sec in solder bath at 260+0/-5°C.	- All terminations shall exhibit a continuous solder coating free from defects from a minimum of 95% of the critical surface area of any individual termination.																																												
17.	Electrical Characterization	- Capacitance - Q/D.F. (Dissipation Factor) Cap≤1000pF 1.0±0.2Vrms, 1MHz±10% Cap>1000pF 1.0±0.2Vrms, 1KHz±10% - Insulation Resistance To apply rated voltage for max. 120 sec. - Dielectric Strength To apply 250% of rated voltage, duration 1~5 sec, charge and discharge current less than 50mA. - Temperature Coefficient (with no electrical load) - Operation temperature: -55~125°C at 25°C	- Capacitance within the specified tolerance. - Q/D.F. value: NPO: Cap≥30pF, Q≥1000; Cap<30pF, Q≥400+20C X7R: <table><tr><th>RATED VOL.</th><th>D.F. ≤</th><th>EXCEPTION OF D.F. ≤</th></tr><tr><td rowspan="2">≥50V</td><td rowspan="2">≤2.5%</td><td>≤3% 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF</td></tr><tr><td>≤5% 1210≥4.7μF</td></tr><tr><td rowspan="2">35V</td><td rowspan="2">≤3.5%</td><td>≤10% 0603≥1μF; 0805≥1μF; 1206≥4.7μF, 1210≥10μF</td></tr><tr><td>≤5% 0805≥2.2μF; 1210≥10μF</td></tr><tr><td rowspan="2">25V</td><td rowspan="2">≤3.5%</td><td>≤5% 0805≥1μF; 1210≥10μF</td></tr><tr><td>≤7% 0603≥0.33μF; 1206≥4.7μF</td></tr><tr><td rowspan="2"></td><td rowspan="2"></td><td>≤10% 0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥6.8μF; 1210≥22μF</td></tr><tr><td></td></tr><tr><td rowspan="2">16V</td><td rowspan="2">≤3.5%</td><td>≤5% 0402≥0.033μF; 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF, 1210≥4.7μF</td></tr><tr><td>≤10% 0402≥0.22μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF</td></tr><tr><td rowspan="2">10V</td><td rowspan="2">≤5%</td><td>≤10% 0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF</td></tr><tr><td>≤15% 0402≥1μF</td></tr><tr><td rowspan="2">6.3V</td><td rowspan="2">≤10%</td><td>≤15% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF</td></tr><tr><td>≤20% 0402≥2.2μF</td></tr><tr><td>4V</td><td>≤15%</td><td>— —</td></tr></table> *I.R.: ≥10GΩ OR RxC≥500Ω·F whichever is smaller. Class II (X7R) <table><tr><th>RATED VOLTAGE</th><th>INSULATION RESISTANCE</th></tr><tr><td>100V: X7R</td><td rowspan="7">10GΩ or RxC≥100 Ω·F whichever is smaller.</td></tr><tr><td>50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF</td></tr><tr><td>35V: 0805≥2.2μF; 1210≥10μF</td></tr><tr><td>25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF</td></tr><tr><td>16V: 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF</td></tr><tr><td>10V: 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF</td></tr><tr><td>6.3V; 4V</td></tr></table> - Dielectric strength - No evidence of damage or flash over during test. - Temperature Coefficient - Capacitance Change: NPO: Within ±30ppm/°C X7R: Within ±15%	RATED VOL.	D.F. ≤	EXCEPTION OF D.F. ≤	≥50V	≤2.5%	≤3% 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF	≤5% 1210≥4.7μF	35V	≤3.5%	≤10% 0603≥1μF; 0805≥1μF; 1206≥4.7μF, 1210≥10μF	≤5% 0805≥2.2μF; 1210≥10μF	25V	≤3.5%	≤5% 0805≥1μF; 1210≥10μF	≤7% 0603≥0.33μF; 1206≥4.7μF			≤10% 0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥6.8μF; 1210≥22μF		16V	≤3.5%	≤5% 0402≥0.033μF; 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF, 1210≥4.7μF	≤10% 0402≥0.22μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF	10V	≤5%	≤10% 0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF	≤15% 0402≥1μF	6.3V	≤10%	≤15% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF	≤20% 0402≥2.2μF	4V	≤15%	— —	RATED VOLTAGE	INSULATION RESISTANCE	100V: X7R	10GΩ or RxC≥100 Ω·F whichever is smaller.	50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF	35V: 0805≥2.2μF; 1210≥10μF	25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF	16V: 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF	10V: 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF	6.3V; 4V
RATED VOL.	D.F. ≤	EXCEPTION OF D.F. ≤																																													
≥50V	≤2.5%	≤3% 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF																																													
		≤5% 1210≥4.7μF																																													
35V	≤3.5%	≤10% 0603≥1μF; 0805≥1μF; 1206≥4.7μF, 1210≥10μF																																													
		≤5% 0805≥2.2μF; 1210≥10μF																																													
25V	≤3.5%	≤5% 0805≥1μF; 1210≥10μF																																													
		≤7% 0603≥0.33μF; 1206≥4.7μF																																													
		≤10% 0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥6.8μF; 1210≥22μF																																													
16V	≤3.5%	≤5% 0402≥0.033μF; 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF, 1210≥4.7μF																																													
		≤10% 0402≥0.22μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF																																													
10V	≤5%	≤10% 0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF																																													
		≤15% 0402≥1μF																																													
6.3V	≤10%	≤15% 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF																																													
		≤20% 0402≥2.2μF																																													
4V	≤15%	— —																																													
RATED VOLTAGE	INSULATION RESISTANCE																																														
100V: X7R	10GΩ or RxC≥100 Ω·F whichever is smaller.																																														
50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF																																															
35V: 0805≥2.2μF; 1210≥10μF																																															
25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF																																															
16V: 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF																																															
10V: 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF																																															
6.3V; 4V																																															




RELIABILITY TEST CONDITIONS AND DIMENSIONS

NO.	TEST ITEM	TEST CONDITION	REQUIREMENTS																																														
18.	Board Flex AEC-Q200-005	- The middle part of substrate shall be pressurized by means of pressurizing rod at a rate of about 1mm per second until the deflection becomes 3mm (2mm for X7R) and then the pressure shall be maintained for 5±1 sec. - Measurement to be made after keeping at room temp. for 24±2 hrs.	- No remarkable damage. - Cap change: NPO: within ±5% or 0.5pF whichever is larger X7R: within ±12.5% (This capacitance change means the change of capacitance under specified flexure of substrate from the capacitance measured before the test.)																																														
19.	Terminal Strength AEC-Q200-006	- Pressurizing force: 2N (0402), 10N (0603), 18N (0805) - Test time: 60±1 sec.	- No remarkable damage or removal of the terminations - Capacitance within the specified tolerance. - Q/D.F. value: NPO: Cap≥30pF, Q≥1000; Cap<30pF, Q≥400+20C X7R: <table><thead><tr><th>RATED VOL.</th><th>D.F. ≤</th><th>EXCEPTION OF D.F. ≤</th></tr></thead><tbody><tr><td rowspan="3">≥50V</td><td>≤3%</td><td>0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF</td></tr><tr><td>≤5%</td><td>1210≥4.7μF</td></tr><tr><td>≤10%</td><td>0603≥1μF; 0805≥1μF; 1206≥4.7μF, 1210≥10μF</td></tr><tr><td rowspan="3">35V</td><td>≤3.5%</td><td>0805≥2.2μF; 1210≥10μF</td></tr><tr><td>≤5%</td><td>0805≥1μF; 1210≥10μF</td></tr><tr><td>≤7%</td><td>0603≥0.33μF; 1206≥4.7μF</td></tr><tr><td rowspan="3">25V</td><td>≤3.5%</td><td>0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥6.8μF; 1210≥22μF</td></tr><tr><td>≤5%</td><td>0402≥0.033μF; 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF, 1210≥4.7μF</td></tr><tr><td>≤10%</td><td>0402≥0.22μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF</td></tr><tr><td rowspan="3">16V</td><td>≤3.5%</td><td>0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF</td></tr><tr><td>≤5%</td><td>0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF</td></tr><tr><td>≤15%</td><td>0402≥1μF</td></tr><tr><td rowspan="3">10V</td><td>≤5%</td><td>0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF</td></tr><tr><td>≤10%</td><td>0402≥2.2μF</td></tr><tr><td>≤20%</td><td>0402≥2.2μF</td></tr><tr><td>6.3V</td><td>≤10%</td><td>0402≥2.2μF</td></tr><tr><td rowspan="2">4V</td><td>≤15%</td><td>—</td></tr><tr><td>—</td><td>—</td></tr></tbody></table>	RATED VOL.	D.F. ≤	EXCEPTION OF D.F. ≤	≥50V	≤3%	0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF	≤5%	1210≥4.7μF	≤10%	0603≥1μF; 0805≥1μF; 1206≥4.7μF, 1210≥10μF	35V	≤3.5%	0805≥2.2μF; 1210≥10μF	≤5%	0805≥1μF; 1210≥10μF	≤7%	0603≥0.33μF; 1206≥4.7μF	25V	≤3.5%	0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥6.8μF; 1210≥22μF	≤5%	0402≥0.033μF; 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF, 1210≥4.7μF	≤10%	0402≥0.22μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF	16V	≤3.5%	0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF	≤5%	0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF	≤15%	0402≥1μF	10V	≤5%	0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF	≤10%	0402≥2.2μF	≤20%	0402≥2.2μF	6.3V	≤10%	0402≥2.2μF	4V	≤15%	—	—	—
RATED VOL.	D.F. ≤	EXCEPTION OF D.F. ≤																																															
≥50V	≤3%	0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF																																															
	≤5%	1210≥4.7μF																																															
	≤10%	0603≥1μF; 0805≥1μF; 1206≥4.7μF, 1210≥10μF																																															
35V	≤3.5%	0805≥2.2μF; 1210≥10μF																																															
	≤5%	0805≥1μF; 1210≥10μF																																															
	≤7%	0603≥0.33μF; 1206≥4.7μF																																															
25V	≤3.5%	0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥6.8μF; 1210≥22μF																																															
	≤5%	0402≥0.033μF; 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF, 1210≥4.7μF																																															
	≤10%	0402≥0.22μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF																																															
16V	≤3.5%	0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF																																															
	≤5%	0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF																																															
	≤15%	0402≥1μF																																															
10V	≤5%	0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF																																															
	≤10%	0402≥2.2μF																																															
	≤20%	0402≥2.2μF																																															
6.3V	≤10%	0402≥2.2μF																																															
4V	≤15%	—																																															
	—	—																																															
20.	Beam Load Test AEC-Q200-003	- Break strength test - Beam speed: 2.5±0.25 mm/sec	The chip endure following force - Chip length ≤2.5mm: Thickness >0.5mm (20N), ≤0.5mm (8N) - Chip length ≥3.2mm: Thickness ≥1.25mm (54.5N), <1.25mm (15N)																																														

TAPE & REEL DIMENSIONS

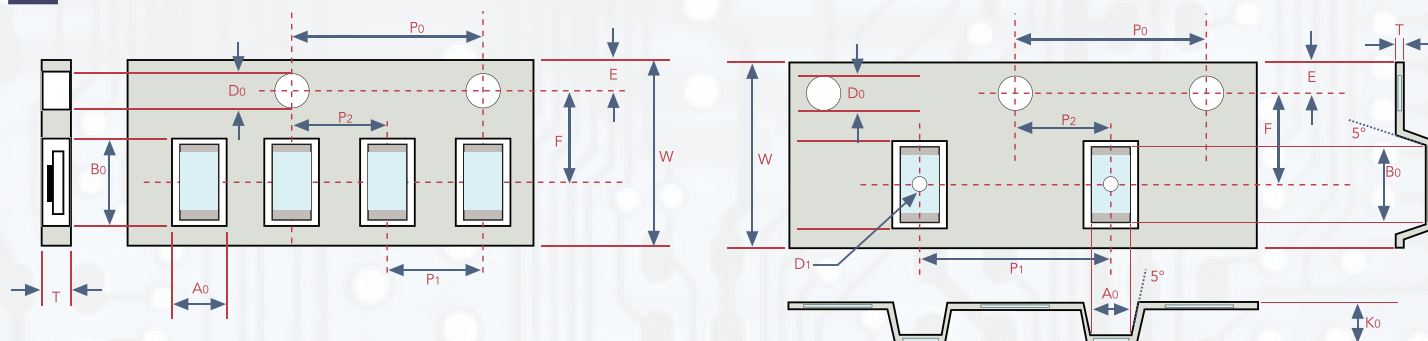

SIZE	0402	0603	0805			1206		
THICKNESS	N	S, B	A	X	M, C, I	X	M, J, C	E
A ₀	0.62±0.05	1.02±0.05	1.05±0.10	1.05±0.10	<1.57	2.00±0.10	<1.85	<1.95
B ₀	1.20±0.05	0.95±0.05	2.30±0.10	2.30±0.10	<2.40	3.50±0.10	<3.46	<3.67
T	0.60±0.05	0.95±0.05	0.75±0.05	0.95±0.05	0.23±0.05	0.95±0.05	0.23±0.05	0.23±0.05
K ₀	-	-	-	-	<2.50	-	<2.50	<2.50
W	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10
P ₀	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10
10 X P ₀	40.00±0.10	40.00±0.10	40.00±0.10	40.00±0.10	40.00±0.10	40.00±0.10	40.00±0.10	40.00±0.10
P ₁	2.00±0.05	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10
P ₂	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05
D ₀	1.55±0.05	1.55±0.05	1.55±0.05	1.55±0.05	1.55±0.05	1.55±0.05	1.55±0.05	1.50±0.05
D ₁	-	-	-	-	1.00±0.10	-	1.00±0.10	1.00±0.10
E	1.75±0.05	1.75±0.05	1.75±0.05	1.75±0.05	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10
F	3.50±0.05	3.50±0.05	3.50±0.05	3.50±0.05	3.50±0.05	3.50±0.05	3.50±0.05	3.50±0.05


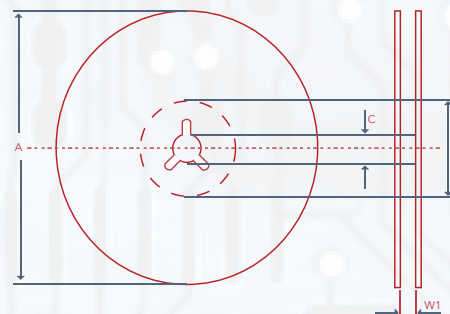


SIZE	0402, 0603, 0805, 1206	
REEL SIZE	7"	10"
C	13.0+0.5/-0.2	13.0+0.5/-0.2
W ₁	8.4+1.5/-0	8.4+1.5/-0
A	178.0±0.10	330.0±1.0
N	60.0+1.0/-0	100+1.0



RECOMMENDED SOLDERING CONDITIONS

- The lead-free termination MLCCs are not only to be used on SMT against lead-free solder paste, but also suitable against lead-containing solder paste. If the optimized solder joint is requested, increasing soldering time, temperature and concentration of N2 within oven are recommended.

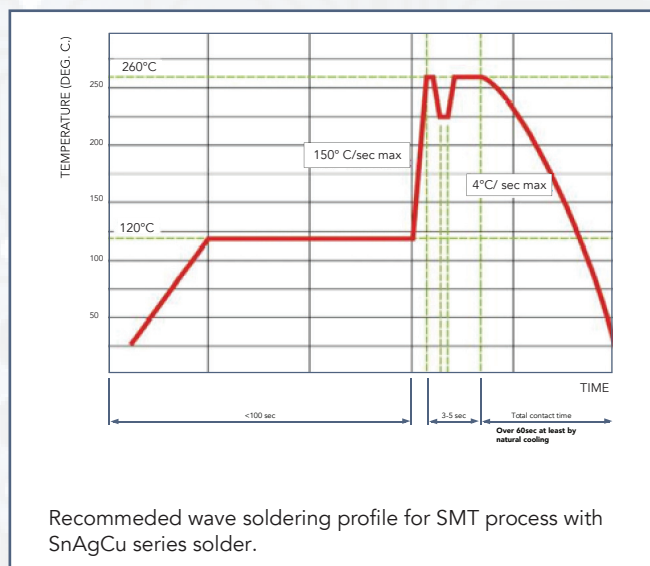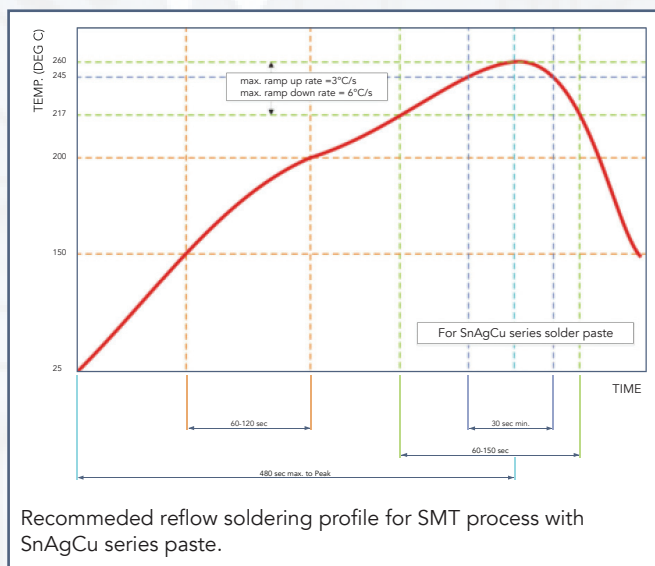

WARRANTY: All passive components supplied by CalChip Electronics, 59 Steamwhistle Drive, Ivyland, PA 18974, are under warranty for a period of 2 years from the date of manufacture. Product will meet or exceed all reliability and test specifications expressed by CalChip for the above mentioned time period provided storage conditions (stated below) are met.

PRODUCT STORAGE INSTRUCTIONS:

- 1) Product must be kept away from direct sunlight.
- 2) Product must be stored in the following conditions
Temperature; 5 to 35°C / 30 to 90°F
Humidity; 45 to 85%
- 3) Product to be kept free of moisture, dirt and debris.

*****WHEN THESE CONDITIONS ARE NOT MET, PRODUCT LIFE COULD BE SHORTENED*****

NOTICE: Specifications are subject to change without notice. Contact your nearest CalChip Sales Office for the latest specifications. All statements, information and data given herein are believed to be accurate and reliable, but are presented without guarantee, warranty, or responsibility of any kind, expressed or implied. Statements or suggestions concerning possible use of our products are made without representation or warranty that any such use is free of patent infringement and are not recommendations to infringe any patent. The user should not assume that all safety measures are indicated or that other measures may not be required. Specifications are typical and may not apply to all applications.



Cal-Chip
Electronics Inc.