


CHIP LED - 1204 - RIGHT ANGLE - AMBER


- CC - AUT1204TS- ED -

FEATURES

- Viewing angle: 160 deg
- The materials of the LED dice is AlGaInP
- 3.20mm x 1.0mm x 1.5mm
- RoHS compliant led-free soldering compatible

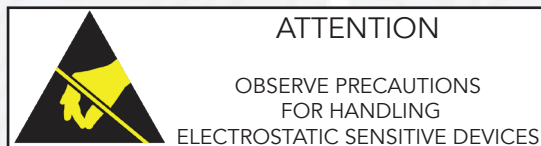

PACKAGE OUTLINE

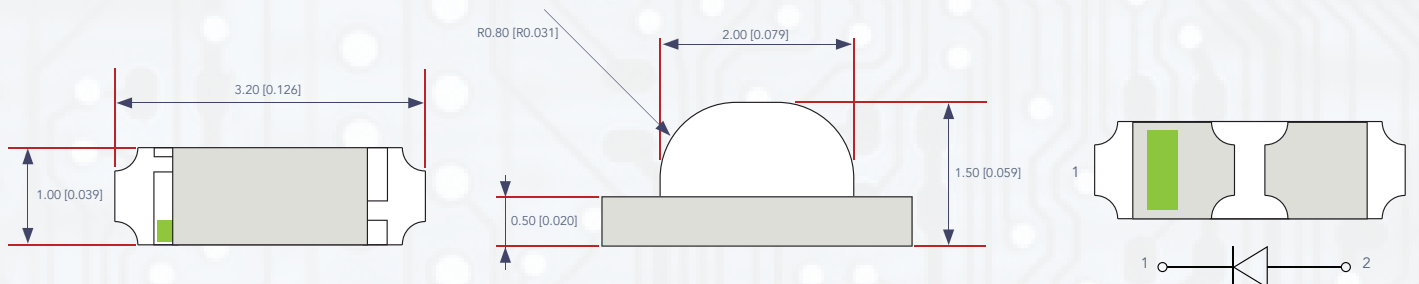

All dimensions are in millimeters (inches); Tolerances are ±0.1mm (0.004inch) unless otherwise noted.

ABSOLUTE MAXIMUM RATINGS AT Ta - 25°C

| PARAMETER | SYMBOL | VALUE | UNIT |
|-----------------------------|--------|------------|------|
| Power Dissipation | Pd | 48 | mW |
| Forward Current | If | 20 | mA |
| Reverse Voltage | Vr | 5 | V |
| Operating Temperature Range | Top | -40 ~ +100 | °C |
| Storage Temperature Range | Tstg | -40 ~ +100 | °C |
| Pulse Forward Current | Ifp | 100 | mA |
| Electrostatic Discharge | ESD | 2000 (HBM) | V |








ELECTRO-OPTICAL CHARACTERISTICS AT Ta - 25°C

| PARAMETER | TEST CONDITION | SYMBOL | VALUE | | | UNIT |
|-------------------------|----------------|-----------------|-------|------|-----|---------|
| | | | MIN | TYPE | MAX | |
| Spectral Half Bandwidth | If - 20mA | $\Delta\lambda$ | - | 15 | - | nm |
| Forward Voltage | If - 20mA | Vf | 1.8 | - | 2.4 | V |
| Dominant Wavelength | If - 20mA | λ_d | 600 | - | 610 | nm |
| Luminous Intensity | If - 20mA | Iv | 70 | - | 180 | mcd |
| Viewing Angle at 50% Iv | If - 20mA | 2 θ 1/2 | - | 160 | - | Deg |
| Reverse Current | Vr - 5V | Ir | - | - | 10 | μ A |

NOTE: (Tolerance: Iv ± 10%, λ_d ± 2nm, Vf ± 0.05V)
IFP Conditions: Pulse Width ≤ 10m sec. and Duty ≤ 1/10.



TYPICAL OPTICAL CHARACTERISTICS CURVES

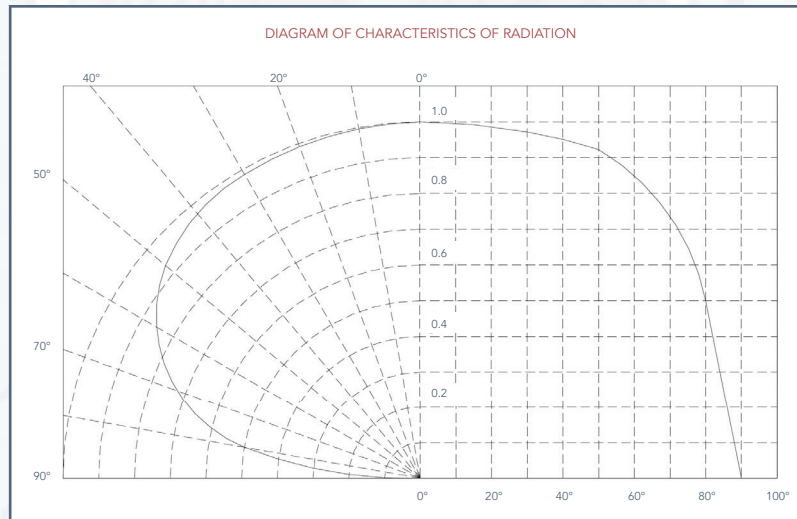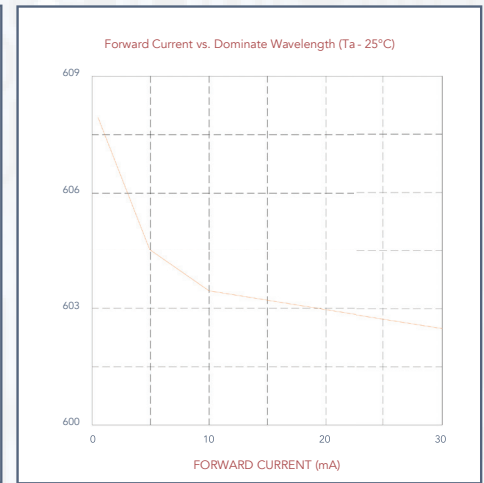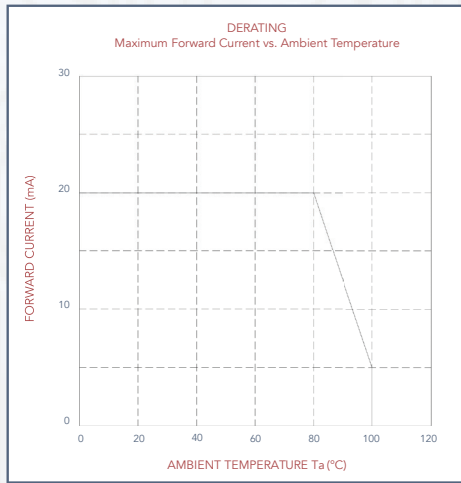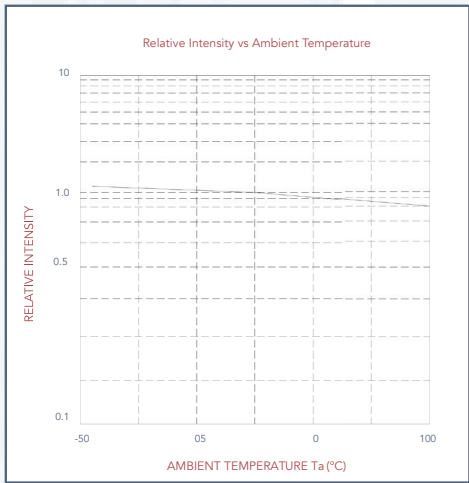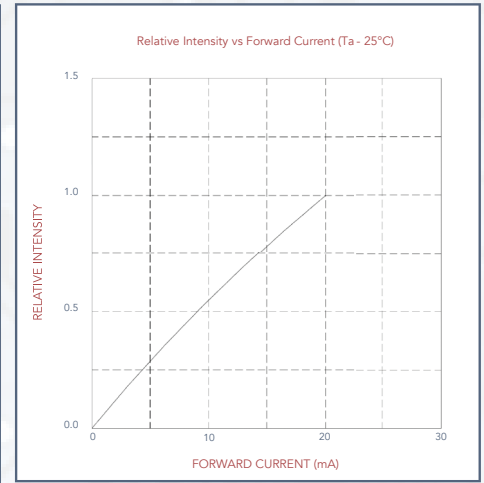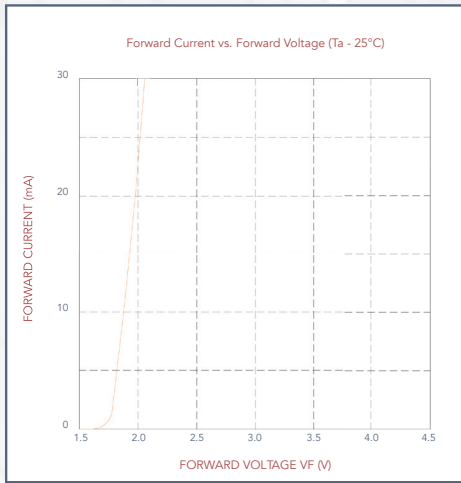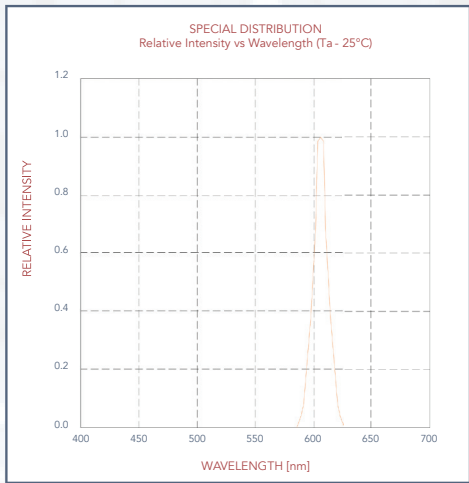

REFLOW PROFILE


- Soldering Condition

Recommended Soldering
After reflow soldering rapid cooling should be avoided

| REFLOW SOLDERING | | HAND SOLDERING | |
|------------------|------------------------------|----------------|------------------------------|
| Pre-Heat | 160 °C ~ 180°C | Temperature | 300°C |
| Pre-Heat Time | 120 Seconds Max. | Soldering Time | 3 Second Max - One Time Only |
| Peak Temperature | 260°C Max | | |
| Soldering Time | 10 Seconds Max | | |
| Condition | Refer to Temperature-profile | | |


- Temperature - profile (surface of circuit board)

Use the following Conditions as shown in figure

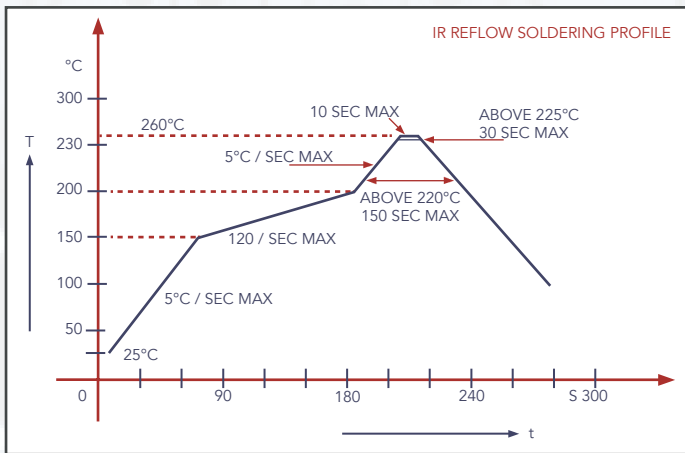

Reflow soldering should not be done more than two times
When soldering, do not put stress on the LEDs during heating

- Recommend Pad Design (Units: mm)

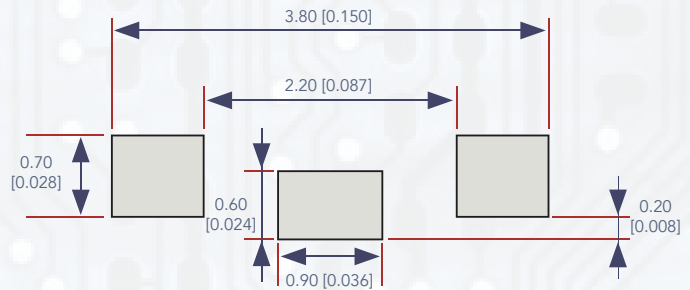


- Soldering Iron

When hand soldering, keep the temperature of the iron under 300°C, and at that temperature keep the time under 3 sec.
The hand soldering should be done only a time
The basic spec is ≤5 sec. when the temperature of 260°C, do not contact the resin when hand soldering.

- Rework

Customer must finish rework within 5 sec under 260°C
The head of iron can not touch the resin
Twin-head type is preferred

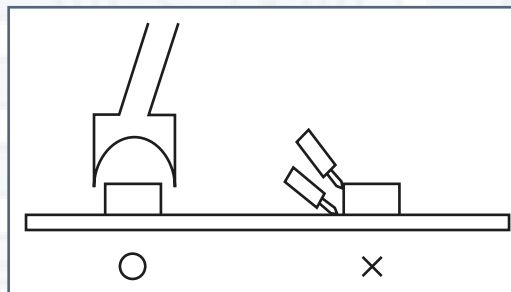

RELIABILITY

- TEST ITEMS AND RESULTS

| TYPE | TEST ITEM | REF STANDARD | TEST CONDITIONS | NOTE | NUMBER OF DAMAGED |
|------------------------|---|---------------|--|-----------|-------------------|
| Environmental Sequence | Resistance to Soldering Heat (Reflow Soldering) | JESD22 - B106 | Tsld - 260°C, 10 sec | 2 times | 0/22 |
| | Temperature Cycle | JESD22 - A104 | -40°C 30 min ↑↓ 5min 100°C 30 min | 300 cycle | 0/22 |
| | Thermal Shock | JESD22 - A106 | -40°C 15min ↑↓ 100°C 15 min | 300 cycle | 0/22 |
| | High Temperature Storage | JESD22 - A103 | T _a - 100°C | 1000 hrs | 0/22 |
| | Low Temperature Storage | JESD22 - A119 | T _a - 40°C | 1000 hrs | 0/22 |
| Operation Sequence | Life Test | JESD22 - A108 | T _a - 25°C I _F - 20mA | 1000 hrs | 0/22 |
| | High Humidity Heat Life Test | JESD22 - A101 | 60°C RH-90% I _F - 20mA | 1000 hrs | 0/22 |

- CRITERIA FOR JUDGING THE DAMAGE


| ITEM | SYMBOL | TEST CONDITIONS | CRITERIA FOR JUDGEMENT | |
|--------------------|--------|-----------------|------------------------|----------------|
| | | | MIN. | MAX. |
| Forward Voltage | VF | IF - 20mA | - | U.S.L.*) x 1.1 |
| Reverse Current | IR | VR - 5V | - | U.S.L.*) x 2.0 |
| Luminous Intensity | IV | IF - 20mA | L.S.L.***) x 0.5 | - |

- U.S.L.: Upper Standard Level
- L.S.L.: Lower Standard Level


NOTE: Any reliability test standard change is confidential

PACKAGING SPECIFICATIONS

- Feeding Direction

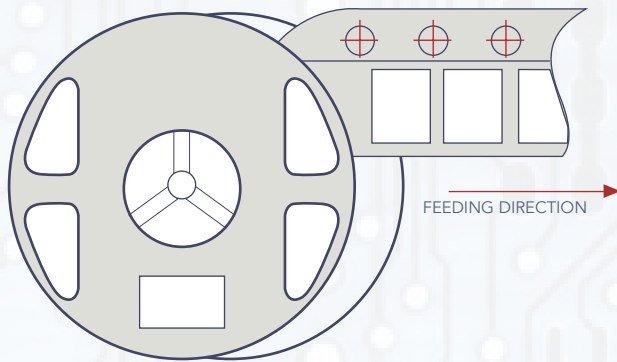

- Dimensions of Reel (Unit: mm)

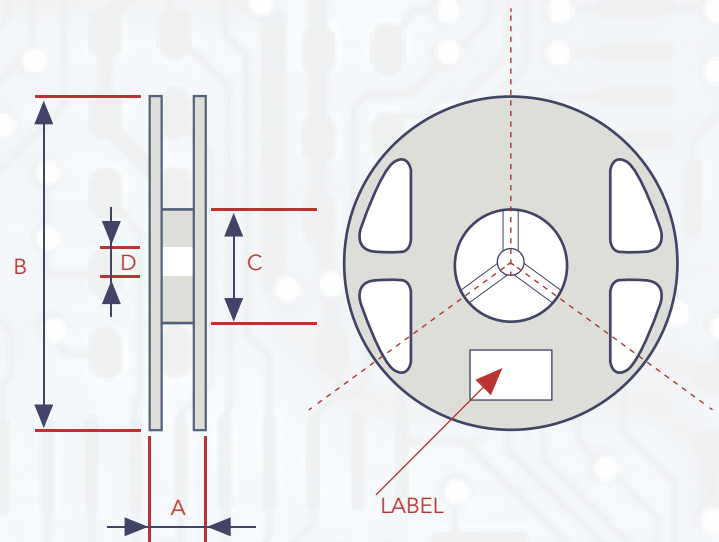


| | |
|---|--------------|
| A | 8.0 ± 0.1mm |
| B | 178 ± 1mm |
| C | 60 ± 1mm |
| D | 13.0 ± 0.5mm |




PACKAGING SPECIFICATIONS

- Dimensions of Tape (Unit: mm)

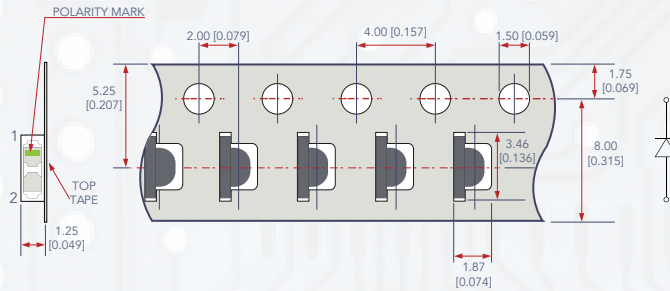


- Arrangement of Tape

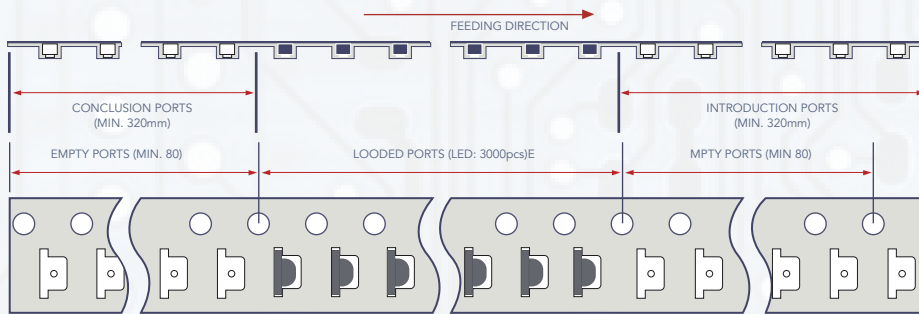


NOTE: Empty component pockets are sealed with top cover tape
 The maximum number of missing lamps is two:
 The cathode is oriented towards the tape sprocket hole in accordance with ANSI/EIA RS-481 specifications.
 3,000 pcs / Reel

PACKAGING SPECIFICATIONS

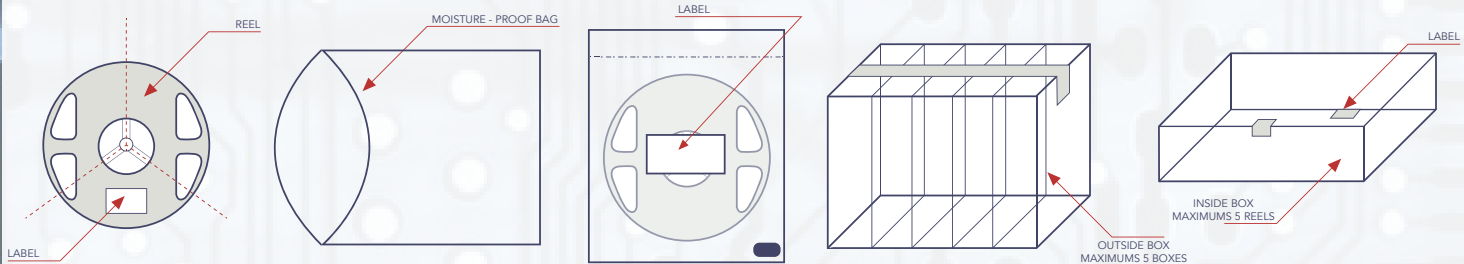

- Label

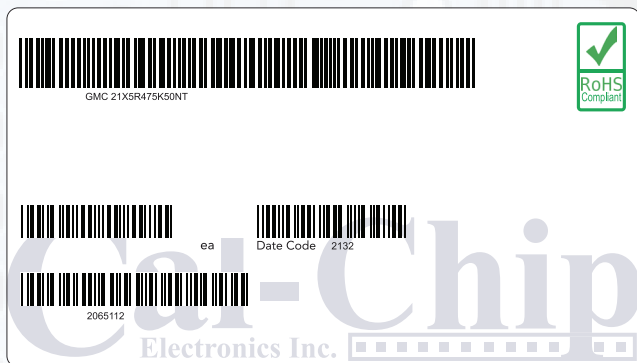

- Cautions

- Packaging Specification

- Reeled products (numbers of products are 3,000 pcs) packed in a seal off moisture-proof bag along with a desiccant one by one, Five moisture-proof bag of maximums (total maximum number of products are 15,000pcs) packed in an inside box (size: about 250mm x about 250 x about 68mm) and Five inside boxes of maximums are put the outside box (size: about 360mm x about 165mm x about 255mm) Together with buffer material, and it is packed. (Part No., Lot No., quantity should appear on the label on the moisture-proof bag, part No. And quantity should appear on the label on the cardboard box.) The number of the loading steps of outside box (cardboard box) has three steps.

- Storage Conditions

- Before Opening the Packaging - The LEDs should be kept at 30°C or less and 70% RH or less. The LEDs should be used within a year. When storing the LEDs, moisture proof packaging with absorbant material is recommended.

- After Opening the Package - The LEDs should be kept at 30°C or less and 60% RH or less. The LEDs should be soldered within 168 hours (7 days) after opening the package. If unused LEDs remain, they should be stored in moisture proof packages, such as sealed containers with packages of moisture absorbant material. It is also recommended to return the LEDs to the original moisture proof bag and to reseal the moisture proof bag again.

