

AUTOMOTIVE GRADE

- CAR SERIES -

FEATURES


- Special construction to prevent sulfuration in a sulfur containing environment
- AEC-Q200 Compliance

APPLICATIONS

- Automotive
- High-end Computer
- Industrial Equipment
- Automatic Equipment Controller
- Medical Equipment
- High-end Multimedia Electronics
- Outdoor Electronic Applications




CONSTRUCTION & DIMENSIONS

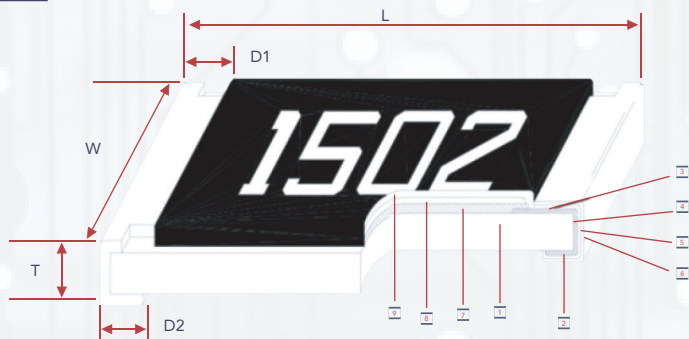


- | | | |
|-------------------------|---------------------------|------------------------------|
| 1 Alumina Substrate | 4 Edge Electrode (NiCr) | 7 Resistor Layer |
| 2 Bottom Electrode (Ag) | 5 Barrier Layer (Ni) | 8 Primary Overcoat (glass) |
| 3 Top Electrode (Ag-Pd) | 6 External Electrode (Sn) | 9 Secondary Overcoat (Epoxy) |

DERATING CURVE

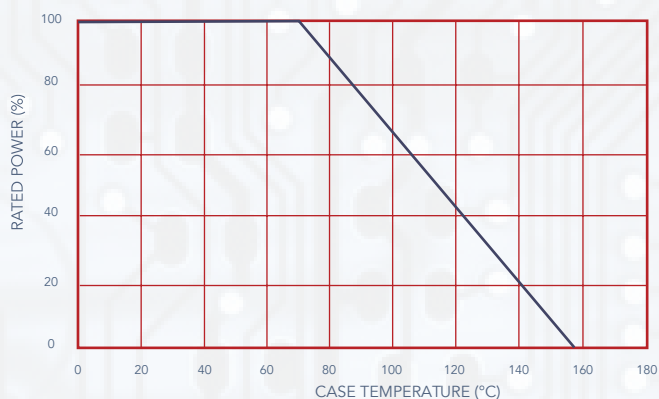


SOLDERING CONDITION


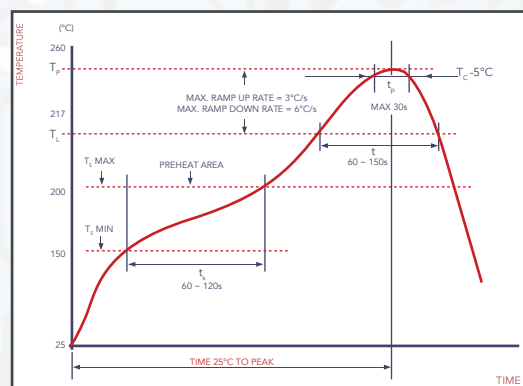


| TYPE | SIZE INCH | L | W | T | D1 | D2 |
|-------|-----------|-------------|-------------|-------------|-------------|-------------|
| CAR02 | 0201 | 0.60 ± 0.03 | 0.30 ± 0.03 | 0.23 ± 0.03 | 0.12 ± 0.05 | 0.15 ± 0.05 |
| CAR04 | 0402 | 1.00 ± 0.05 | 0.50 ± 0.05 | 0.35 ± 0.05 | 0.25 ± 0.10 | 0.20 ± 0.10 |
| CAR06 | 0603 | 1.60 ± 0.10 | 0.80 ± 0.10 | 0.45 ± 0.10 | 0.30 ± 0.20 | 0.30 ± 0.20 |
| CAR10 | 0805 | 2.00 ± 0.15 | 1.25 ± 0.15 | 0.55 ± 0.10 | 0.40 ± 0.20 | 0.40 ± 0.20 |
| CAR12 | 1206 | 3.10 ± 0.15 | 1.55 ± 0.15 | | 0.50 ± 0.25 | 0.50 ± 0.20 |
| CAR14 | 1210 | 3.10 ± 0.10 | 2.60 ± 0.20 | | | |
| CAR20 | 2010 | 5.00 ± 0.10 | 2.50 ± 0.20 | | | |
| CAR25 | 2512 | 6.35 ± 0.10 | 3.10 ± 0.20 | | 0.60 ± 0.25 | |

PART NUMBERING

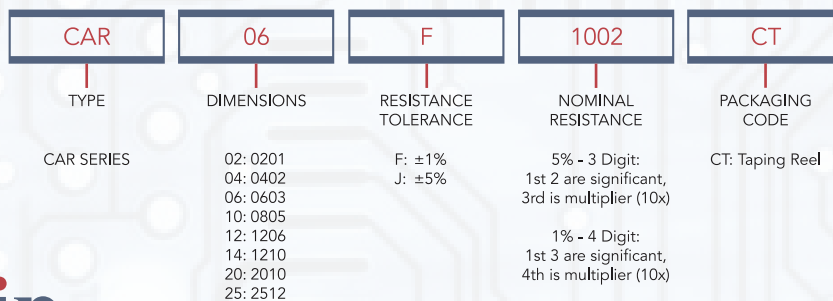

MARKING

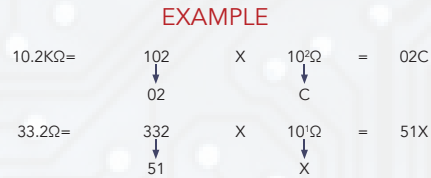

- Marking for CAR06 E-24, E-96 series, the resistance value that no have multiplier code indicate marking follow this:
The first two digits are significant figures of resistance and the third one denoted number of zeros and under line the marking letters.

- Example



- RESISTORS

Marking for E-96 series in CAR10, CAR12, CAR14, CAR20, CAR25 size : 4 Digits

*The first 3 digits are singnificant figures of resistance and the 4th digit denoted number of zeros.

*For ohmic values below 100 Ω, letter "R" is for decimal point.

Example



Example



*For ohmic values below 10 Ω

Example



Marking for E-24 series in CAR10, CAR12, CAR14, CAR20, CAR25 size : 3 Digits

*The first 2 digits are singnificant figures of resistance and the 3rd digit denoted number of zeros.

- 0Ω Marking:

Normally, the marking of 0Ω CAR10, CAR12, CAR14, CAR20, CAR25 resistors as following

Example



Example



- LABLES

Label shall be marked with the following item :

- A: Cal-Chip Part Number
- B: Customer P/N Where Applicable
- C: Quantity
- D: Date Code
- E: Lot No.


PERFORMANCE SPECIFICATION


| CHARACTERISTICS | LIMITS | TEST METHODS |
|-------------------------------------|---|--|
| Operational Life | $\pm 1\%$: $\pm(1.0\%+0.1\Omega)$ Max. $\pm 5\%$: $\pm(3.0\%+0.1\Omega)$ Max. | 1,000 hours at $125\pm 3^\circ\text{C}$, applied de-rated (36%) power of continuous working voltage, 1.5 hours on, 0.5 hour off, still air required. |
| | <100m Ω | Apply to rate current for 0 Ω |
| Temperature Coefficient | CAR02: $1\Omega \leq R \leq 10\Omega$: $-100 \sim +350$ ppm/ $^\circ\text{C}$ >10 Ω : ± 200 ppm/ $^\circ\text{C}$ CAR04 - CAS25: $1\Omega \leq R \leq 10\Omega$: ± 200 ppm/ $^\circ\text{C}$ >10 Ω : ± 100 ppm/ $^\circ\text{C}$ | Parametrically test per lot and sample size requirements, summary to show Min, Max, Mean and Standard deviation at room as well as Min and Max operating temperatures |
| Short-Time Overload | $\pm 1\%$: $\pm(1.0\%+0.05\Omega)$ Max $\pm 5\%$: $\pm(2.0\%+0.05\Omega)$ Max | 4.13 Permanent resistance change after the application of potential of 2.5 times RCWV or Max. Overload Voltage whichever less for 5 seconds (JIS-C-5201& JIS-C-5202) |
| | <50m Ω | Apply max Overload Current for 0 Ω |
| External Visual | No Mechanical Damage | Electrical test not required. Inspect device construction, marking and workmanship (MIL-STD-883 Method 2009) |
| Physical Dimension | Reference 5. Dimension Standards | Certify physical dimensions to the applicable device detail specification. Note: User(s) and supplies spec. Electrical test not required. (JESD22 MH Method JB-100) |
| Resistance to Solvent | Marking Unsmearred | Note: Add Aqueous wash chemical - OKEM Clean or equivalent. Do not use banned solvents. (MIL-STD-202 Method 215) |
| Terminal Strength | Not Broken | Force 1.8kg for 60 seconds.. (JIS-C-6429) |
| High Temperature Exposure (Storage) | $\pm(1.0\%+0.05\Omega)$ Max. | 1000hrs. @T= 155°C . Unpowered. Measurement at 24 ± 2 hours after test conclusion (MIL-STD-202 Method 108) |
| | <50m Ω | Apply to rate current for 0 Ω |
| Temperature Cycling | $\pm(1.0\%+0.05\Omega)$ Max. | 1000 Cycles (-55°C to $+155^\circ\text{C}$). Measurement at 24 ± 2 hours after test conclusion. (JESD22 Method JA-104) |
| | <50m Ω | Apply to rate current for 0 Ω |
| Biased Humidity | 1%: $\pm(1.0\%+0.05\Omega)$ Max. 5%: $\pm(3.0\%+0.05\Omega)$ Max | 10% rated power, $85^\circ\text{C}/85\%RH$, 1000Hr, Measurement at 24 hours after test conclusion. (MIL-STD-202 Method 103) |
| | <100m Ω | Apply to rate current for 0 Ω |
| Mechanical Shock | $\pm(1.0\%+0.05\Omega)$ Max. | Wave Form: Tolerance for half sine shock pulse. Peak value is 100g's. Normal duration (D) is 6ms, velocity 12.3ft/s 100Hz. (MIL-STD-202 Method 213) |
| Vibration | $\pm(1.0\%+0.05\Omega)$ Max. | 5g's for 20 min., 12cycle each of 3 orientations. Note: Use 8"*5"PCB. 031" thick 7 secure points on one long side and 2 secure points at corners of opposite sides. Parts mounted within 2' from any secure point. Test from 10-2000Hz. (MIL-STD-202 Method 204) |
| ESD | $\pm(1.0\%+0.05\Omega)$ Max. | With the electrometer in direct contact with the discharge tip, verify the voltage setting at levels of $\pm 500\text{V}$, $\pm 1\text{KV}$, $\pm 2\text{KV}$, $\pm 4\text{KV}$, $\pm 8\text{KV}$, The electrometer reading shall be within $\pm 10\%$ for voltages from 500V to $\leq 800\text{V}$. |
| Solderability | 95% Coverage Min | For both leaded & SMD. Electrical test not required. Magnification 50X. Conditions: a) Method B 4hrs at 155°C dry heat, the dip in bath with 245°C , 5s. b) Method B: at 215°C , 5s. c) Method D: at 260°C , 60s. (J-STD-002) |
| Flammability | No ignition of the tissue paper or scorching or the pinewood board | V-0 or V-1 are acceptable. Electrical test not required (UL-94) |
| Board Flex | $\pm(1.0\%+0.05\Omega)$ Max. | Bending 3mm (CAR02-CAS10) / 2mm (CAR12-CAR25) for 60 ± 5 sec. (JIS-C-6429) |
| | <50m Ω | Apply to rate current for 0 Ω |
| Flame Retardance | No Flame | Temperature at 500°C , Voltage powr subjected to 32VDC current clamped up to 500 VDC and decreased in 1.0VDC/hour. (AEC-Q200-001) |
| Resistance to Soldering Heat | $\pm(1.0\%+0.05\Omega)$ Max. | Conidition B no per-heat of samples. Note: Single Wave Solder-Procedure 2 for SMD and Procedure 1 for Leaded with solder within 1.5mm of device body. (MIL-STD-202 Mehtod 210) |
| | <50m Ω | Apply to rate current for 0 Ω |




PACKAGING

- Reel Specifications & Packaging Quantity

| TYPE | PACKAGING QUANTITY | TYPE WIDTH | REEL DIAMETER | ØA | ØB | ØC | W | T | |
|-------|--------------------|------------|---------------|-------------|--------------------|--------------------|------------|------------|------------|
| CAR02 | Paper | 15K | 7 inch | 178.5 ± 1.5 | 60 ^{+1/0} | 13.0 ± 0.5 | 10 ± 1 | 12.5 ± 0.5 | |
| CAR04 | | 10K | | | | | | | |
| CAR06 | | 5K | | | | | | | 8mm |
| CAR10 | | | | | | | | | |
| CAR12 | | | | | | | | | |
| CAR14 | | | | | | | | | |
| CAR20 | Embossed | 4K | 12mm | 7 inch | 178.5 ± 1.5 | 60 ^{+1/0} | 13.0 ± 0.5 | 13.0 ± 0.5 | 15.5 ± 0.5 |
| CAR25 | | | | | | | | | |

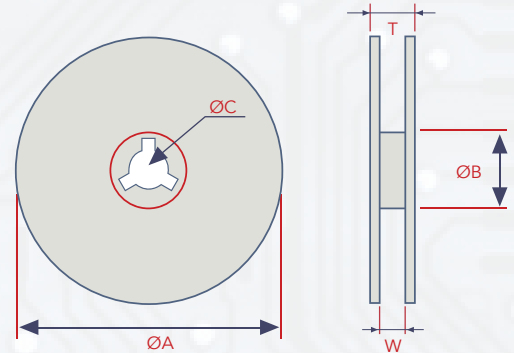


- Paper Tape Specifications

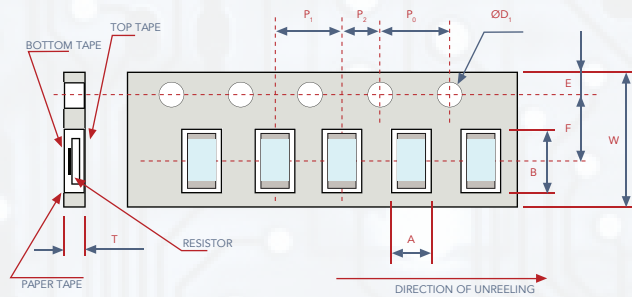


| TYPE | A | B | W | E | F | P ₀ | P ₁ | P ₂ | ØD ₀ | T |
|-------|-----------|-----------|----------|-----------|-----------|----------------|----------------|----------------|-----------------|-----------|
| CAR02 | 0.40±0.05 | 0.70±0.05 | 8.0±0.20 | 1.75±0.10 | 3.50±0.05 | 4.00±0.10 | 2.00±0.05 | 2.00±0.05 | 1.50+0.1,-0 | 0.42±0.10 |
| CAR04 | 0.65±0.10 | 1.15±0.10 | | | | | | | | 0.45±0.10 |
| CAR06 | 1.10±0.10 | 1.90±0.10 | | | | | | | | 0.67±0.10 |
| CAR10 | 1.60±0.10 | 2.40±0.20 | | | | | 4.00±0.05 | | | 0.81±0.10 |
| CAR12 | 1.90±0.10 | 3.50±0.20 | | | | | | | | |
| CAR14 | 2.90±0.10 | 3.50±0.20 | | | | | | | | |

- Embossed Tape Specifications

| TYPE | A | B | W | E | F | P ₀ | P ₁ | P ₂ | ØD ₀ | T |
|-------|----------|----------|-----------|-----------|----------|----------------|----------------|----------------|-----------------|-------------------|
| CAR20 | 2.9±0.20 | 5.6±0.20 | 12.0±0.30 | 1.75±0.10 | 5.5±0.05 | 4.00±0.10 | 4.00±0.10 | 2.00±0.05 | 1.50+0.1,-0 | 1.2 ^{±0} |
| CAR25 | 3.5±0.20 | 6.7±0.20 | | | | | | | | |

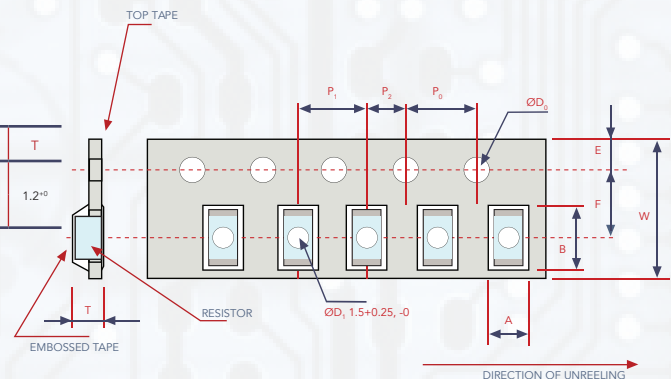

RECOMMENDED LAND PATTERN

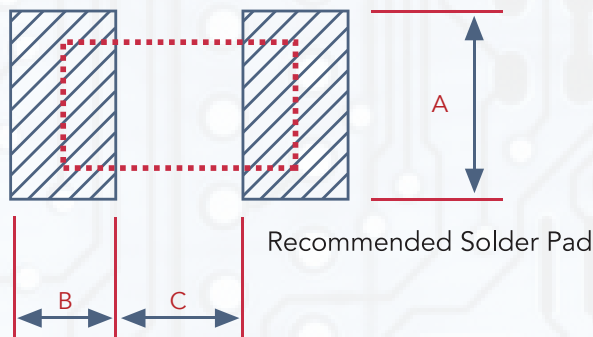

| TYPE | A | B | C |
|-------|------------|-------------|------------|
| CAR02 | 0.4 ± 0.05 | 0.35 ± 0.05 | 0.3 ± 0.05 |
| CAR04 | 0.5 ± 0.05 | 0.45 ± 0.05 | 0.5 ± 0.05 |
| CAR06 | 0.8 ± 0.05 | 0.65 ± 0.05 | 0.8 ± 0.05 |
| CAR10 | 1.3 ± 0.1 | 1.0 ± 0.1 | 1.0 ± 0.1 |
| CAR12 | 1.6 ± 0.1 | 1.1 ± 0.1 | 2.0 ± 0.1 |
| CAR14 | 2.6 ± 0.1 | 1.1 ± 0.1 | 2.0 ± 0.1 |
| CAR20 | 2.6 ± 0.1 | 1.3 ± 0.1 | 3.6 ± 0.1 |
| CAR25 | 3.3 ± 0.1 | 1.6 ± 0.1 | 4.9 ± 0.1 |