

SMD ALUMINUM ELECTROLYTIC CAPACITORS


- CVI SERIES -

■ FEATURES

- $50\sim80\Omega$, 105°C , 2,000 hours assured
- Low impedance 30~50% less than CVH series
- Designed for surface mounting on high density PC board
- RoHS Compliance



■ CONSTRUCTION AND DIMENSIONS

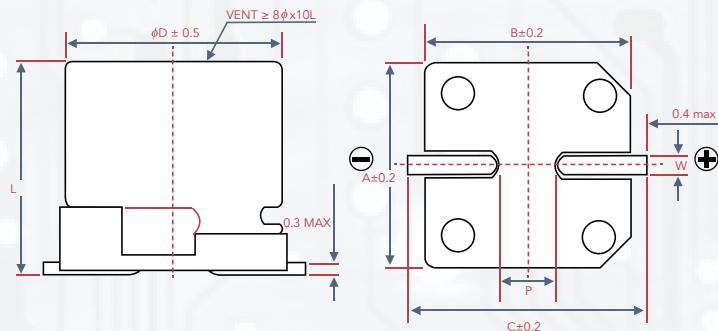


■ LEAD SPACING AND DIAMETER

ϕD	L	A	B	C	W	$P \pm 0.2$
5	5.7 ± 0.3	5.3	5.3	6.1	0.5 ~ 0.8	1.5
6.3	5.7 ± 0.3	6.6	6.6	7.4	0.5 ~ 0.8	2.0
8	10 ± 0.5	8.4	8.4	9.2	0.7 ~ 1.1	3.1

■ PART NUMBER

CVI	1C	101	M	E60	R
SERIES NAME	RATED VOLTAGE	CAPACITANCE	TOLERANCE	CASE SIZE	PACKAGE TYPE
Series is represented by a three/four digit code	OG - 4V OJ - 6.3V 1A - 10V 1C - 16V 1E - 25V 1V - 35V 1H - 50V 1J - 63V 1K - 80V 2A - 100V 2C - 160V 2D - 200V 2E - 250V 2G - 400V 2W - 450V	220 - 22μF 101 - 100μF	V: -10% ~+20% M: -20% ~+20% K: -10% ~+10% J: -5% ~+5%	B55 - 3x5.3 D55 - 4x5.3 D60 - 4x5.7 E55 - 5x5.3 E60 - 5x5.7 F55 - 6.3x5.3 F60 - 6.3x5.7 F62 - 6.3x6.0 F72 - 6.3x7.0 F80 - 6.3x7.7 G68 - 8x6.5 G72 - 8x7.0 G10 - 8x10.0 G12 - 8x12.0 H82 - 10x8.0 H10 - 10x10.0 H13 - 10x13.0 K14 - 12.5x13.5 K16 - 12.5x16.0 L17 - 16x16.5	R - Taping polarity with reel package in 380mm

■ MARKING

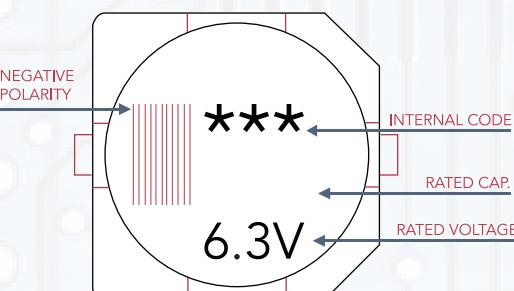


SPECIFICATIONS

ITEM	SPECIFICATION										
Category Temperature Range	-55°C ~ +105°C										
Capacitance Tolerance	±20% (at 120Hz, 20°C)										
Leakage Current (20°C)	$I=0.01CV$ or $3 (\mu A)$ whichever is greater (after 2 minutes) Where, C = rated capacitance in μF , V= rated DC working voltage in V										
Tan δ at 120Hz, 20°C	RATED VOLTAGE	6.3	10	16	25	35					
	TAN δ (MAX)	0.30	0.26	0.22	0.16	0.13					
	When capacitance exceeds 1,000 μF , 0.02 shall be added every 1,000 μF increase										
Low Temperature Characteristics (at 120Hz)	Impedance ratio shall not exceed the values given in the table below.										
	RATED VOLTAGE	6.3	10	16	25	35					
	IMPEDANCE RATIO	Z(-25°C) / Z(+20°C)	4	3	2	2					
	Z(-55°C) / Z(+20°C)	8	5	4	3	3					
Endurance	TEST TIME	2,000 Hrs									
	CAPACITANCE CHANGE	Within ±30% of initial value									
	TAN δ	Less than 300% of specified value									
	LEAKAGE CURRENT	Within specified value									
*The above specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for 2,000 ~ 5,000 hrs at 105°C.											
Shelf Life Test	Test time: 1,000 hours; other items are the same as those for the Endurance										
Ripple Current & Frequency Multipliers	FREQUENCY	50, 60	120	1K	10K up						
	MULTIPLIER	0.60	0.70	0.85	1.0						


DIMENSION & PERMISSIBLE RIPPLE CURRENT

CONTENTS μF	VDC	6.3V (OJ)			10V (1A)			16V (1C)			25V (IE)			35V (IV)		
		$\emptyset DxL$	IMP.	mA												
22	220							5x5.7	0.36	240	5x5.7	0.36	240	5x5.7	0.36	240
33	330				5x5.7	0.36	240				5x5.7	0.36	240	5x5.7	0.36	240
47	470	5x5.7	0.36	240				5x5.7	0.36	240	5x5.7	0.36	240	6.3x5.7	0.26	300
68	680							5x5.7	0.36	240	6.3x5.7	0.26	300	6.3x5.7	0.26	300
100	101	5x5.7	0.36	240	5x5.7	0.36	240	6.3x5.7	0.26	300	6.3x5.7	0.26	300	6.3x5.7	0.26	300
150	151	5x5.7	0.36	240	6.3x5.7	0.26	300	6.3x5.7	0.26	300	8x10	0.08	850	8x10	0.08	850
220	221	6.3x5.7	0.26	300	6.3x5.7	0.26	300	8x10	0.08	850	8x10	0.08	850			
330	331	6.3x5.7	0.26	300	8x10	0.08	850	8x10	0.08	850	8x10	0.08	850			
470	471	8x10	0.16	850	8x10	0.16	850	8x10	0.16	850						
680	681	8x10	0.16	850	8x10	0.16	850									



Cal-Chip
Electronics Inc.