

SMD ALUMINUM ELECTROLYTIC CAPACITORS



- CVJ SERIES -

FEATURES

- 4φ ~ 18φ, 105°C, 2,000 hours assured
- Designed for surface mounting on high density PC board
- RoHS Compliance



CONSTRUCTION AND DIMENSIONS

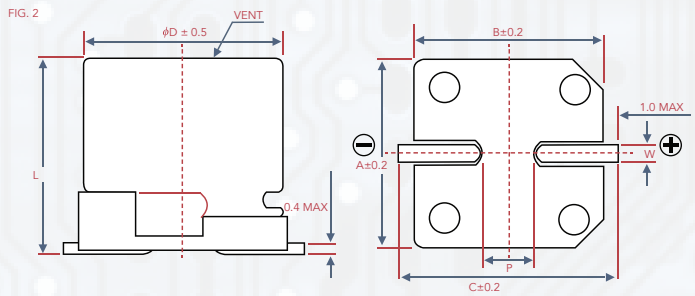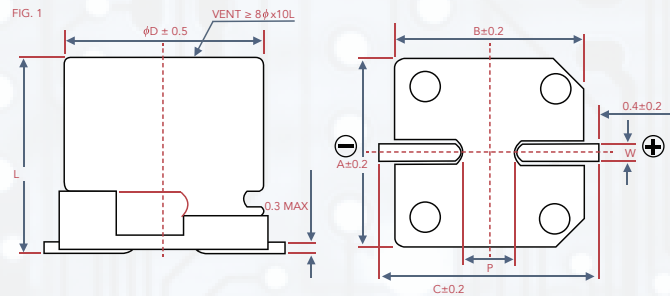

LEAD SPACING AND DIAMETER

UNIT : MM

φD	L	A	B	C	W	P±0.2	FIG NO.
4	5.7 ± 0.3	4.3	4.3	5.1	0.5-0.8	1.0	1
5	5.7 ± 0.3	5.3	5.3	5.9	0.5-0.8	1.5	1
6.3	5.7 ± 0.3	6.6	6.6	7.2	0.5-0.8	2.0	1
6.3	7.7 ± 0.3	6.6	6.6	7.2	0.5-0.8	2.0	1
8	6.5 ± 0.3	8.4	8.4	9.0	0.5-0.8	2.3	1
8	10 ± 0.5	8.4	8.4	9.0	0.7-1.1	3.1	1
10	7.7 ± 0.3	10.4	10.4	11.0	0.7-1.3	4.7	1
10	10 ± 0.5	10.4	10.4	11.0	0.7-1.3	4.7	1
12.5	13.5 ± 0.5	13.0	13.0	13.7	1.1-1.4	4.4	2
12.5	16 ± 0.5	13.0	13.0	13.7	1.1-1.4	4.4	2
16	16.5 ± 0.5	17.0	17.0	18.0	1.1-1.4	6.4	2
16	21.5 ± 0.5	17.0	17.0	18.0	1.1-1.4	6.4	2
18	16.5 ± 0.5	19.0	19.0	20.0	1.1-1.4	6.4	2
18	21.5 ± 0.5	19.0	19.0	20.0	1.1-1.4	6.4	2

PART NUMBER


CVJ	1C	100	M	D60	R
SERIES NAME	RATED VOLTAGE	CAPACITANCE	TOLERANCE	CASE SIZE	PACKAGE TYPE
Series is represented by a two or three digit code.	OG - 4V OJ - 6.3V 1A - 10V 1C - 16V 1E - 25V 1V - 35V 1H - 50V 1J - 63V 1K - 80V 2A - 100V	1R0 - 1μF 100 - 10μF 101 - 100μF 102 - 1000μF	M: -20% ~ +20% K: -10% ~ +10% J: -5% ~ +5%	B55 - 3x5.3 D55 - 4x5.3 D60 - 4x5.7 E55 - 5x5.3 E60 - 5x5.7 F55 - 6.3x5.3 F60 - 6.3x5.7 F62 - 6.3x6.0 F72 - 6.3x7.0 F80 - 6.3x7.7 G68 - 8x6.5 G72 - 8x7.0 G10 - 8x10.0 G12 - 8x12.0 H82 - 10x8.0 H10 - 10x10.0 H13 - 10x13.0 K14 - 12.5x13.5 K16 - 12.5x16.0 L17 - 16x16.5	R - Taping polarity with reel package in 380mm



SPECIFICATIONS

ITEMS	PERFORMANCE																																																													
Category Temperature Range	<table border="1"> <tr> <td>6.3 ~ 100V</td> <td>160 ~ 400V</td> <td>450V</td> </tr> <tr> <td>-55°C ~ +105°C</td> <td>-40°C ~ +105°C</td> <td>-25°C ~ +105°C</td> </tr> </table>	6.3 ~ 100V	160 ~ 400V	450V	-55°C ~ +105°C	-40°C ~ +105°C	-25°C ~ +105°C																																																							
6.3 ~ 100V	160 ~ 400V	450V																																																												
-55°C ~ +105°C	-40°C ~ +105°C	-25°C ~ +105°C																																																												
Capacitance Tolerance	±20% (at 120Hz, 20°C)																																																													
Leakage Current (at 20°C)	<table border="1"> <tr> <th>RATED VOLTAGE</th> <th colspan="2">6.3 ~ 100V</th> <th colspan="3">160 ~ 450V</th> </tr> <tr> <th>TIME</th> <td colspan="2">after 2 minutes</td> <td colspan="3">after 5 minutes</td> </tr> <tr> <th>CASE SIZE</th> <td colspan="2">4 ~ 10φ</td> <td colspan="2">12.5 ~ 18φ</td> <td>12.5 ~ 18φ</td> </tr> <tr> <th>LEAKAGE CURRENT</th> <td colspan="2">I=0.01CV or 3μA, whichever is greater</td> <td colspan="2">I=0.03CV or 4μA, whichever is greater</td> <td>I=0.04CV or 100μA,</td> </tr> </table> <p>Where, C= rated capacitance in μF, V = rated DC working voltage in V</p>	RATED VOLTAGE	6.3 ~ 100V		160 ~ 450V			TIME	after 2 minutes		after 5 minutes			CASE SIZE	4 ~ 10φ		12.5 ~ 18φ		12.5 ~ 18φ	LEAKAGE CURRENT	I=0.01CV or 3μA, whichever is greater		I=0.03CV or 4μA, whichever is greater		I=0.04CV or 100μA,																																					
RATED VOLTAGE	6.3 ~ 100V		160 ~ 450V																																																											
TIME	after 2 minutes		after 5 minutes																																																											
CASE SIZE	4 ~ 10φ		12.5 ~ 18φ		12.5 ~ 18φ																																																									
LEAKAGE CURRENT	I=0.01CV or 3μA, whichever is greater		I=0.03CV or 4μA, whichever is greater		I=0.04CV or 100μA,																																																									
Tan δ at 120Hz, 20°C	<table border="1"> <tr> <th>RATED VOLTAGE</th> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>100</td> <td>160~250</td> <td>400~450</td> </tr> <tr> <th>4 ~ 10φ</th> <td>0.45</td> <td>0.35</td> <td>0.28</td> <td>0.18</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.12</td> <td>-</td> <td>-</td> </tr> <tr> <th>12.5 ~ 18φ</th> <td>0.40</td> <td>0.38</td> <td>0.34</td> <td>0.26</td> <td>0.22</td> <td>0.18</td> <td>0.14</td> <td>0.10</td> <td>0.20</td> <td>0.25</td> </tr> </table> <p>*When the capacitance exceeds 1,000 μF, 0.002 shall be added every 1,000 μF increase.</p>	RATED VOLTAGE	6.3	10	16	25	35	50	63	100	160~250	400~450	4 ~ 10φ	0.45	0.35	0.28	0.18	0.16	0.14	0.12	0.12	-	-	12.5 ~ 18φ	0.40	0.38	0.34	0.26	0.22	0.18	0.14	0.10	0.20	0.25																												
RATED VOLTAGE	6.3	10	16	25	35	50	63	100	160~250	400~450																																																				
4 ~ 10φ	0.45	0.35	0.28	0.18	0.16	0.14	0.12	0.12	-	-																																																				
12.5 ~ 18φ	0.40	0.38	0.34	0.26	0.22	0.18	0.14	0.10	0.20	0.25																																																				
Low Temperature Characteristics (at 120Hz)	<p>Impedance ratio shall not exceed the values given in the table below.</p> <table border="1"> <tr> <th colspan="2">RATED VOLTAGE</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>100</th> <th>160~250</th> <th>160~250</th> </tr> <tr> <th rowspan="3">IMPEDANCE RATIO</th> <th>Z(-25°C) / Z(+20°C)</th> <td>φD<12.5</td> <td>4</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>3</td> <td>-</td> <td>-</td> </tr> <tr> <td></td> <td>φD≥12.5</td> <td>5</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>3</td> <td>6</td> <td></td> </tr> <tr> <th>Z(-55°C) / Z(+20°C)</th> <td>φD<12.5</td> <td>12</td> <td>8</td> <td>6</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> <td>4</td> <td>-</td> <td>-</td> </tr> <tr> <td></td> <td></td> <td>φD≥12.5</td> <td>10</td> <td>8</td> <td>6</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> <td>6</td> <td>10</td> </tr> </table>	RATED VOLTAGE		6.3	10	16	25	35	50	63	100	160~250	160~250	IMPEDANCE RATIO	Z(-25°C) / Z(+20°C)	φD<12.5	4	4	3	2	2	2	2	3	-	-		φD≥12.5	5	4	3	2	2	2	2	3	6		Z(-55°C) / Z(+20°C)	φD<12.5	12	8	6	4	3	3	3	4	-	-			φD≥12.5	10	8	6	4	3	3	3	6	10
RATED VOLTAGE		6.3	10	16	25	35	50	63	100	160~250	160~250																																																			
IMPEDANCE RATIO	Z(-25°C) / Z(+20°C)	φD<12.5	4	4	3	2	2	2	2	3	-	-																																																		
		φD≥12.5	5	4	3	2	2	2	2	3	6																																																			
	Z(-55°C) / Z(+20°C)	φD<12.5	12	8	6	4	3	3	3	4	-	-																																																		
		φD≥12.5	10	8	6	4	3	3	3	6	10																																																			
Endurance	<table border="1"> <tr> <th>TEST TIME</th> <td>2,000 Hrs</td> </tr> <tr> <th>CAPACITANCE CHANGE</th> <td>Within ±25% of initial value for φD ≤ 6.3mm Within ±20% of initial value for φD ≥ 8mm</td> </tr> <tr> <th>TAN δ</th> <td>Less than 300% of specified value for φD ≤ 6.3mm Less than 200% of specified value for φD ≥ 8mm</td> </tr> <tr> <th>LEAKAGE CURRENT</th> <td>Within specified value</td> </tr> </table> <p>*The above specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for 2,000 hrs at 105°C.</p>	TEST TIME	2,000 Hrs	CAPACITANCE CHANGE	Within ±25% of initial value for φD ≤ 6.3mm Within ±20% of initial value for φD ≥ 8mm	TAN δ	Less than 300% of specified value for φD ≤ 6.3mm Less than 200% of specified value for φD ≥ 8mm	LEAKAGE CURRENT	Within specified value																																																					
TEST TIME	2,000 Hrs																																																													
CAPACITANCE CHANGE	Within ±25% of initial value for φD ≤ 6.3mm Within ±20% of initial value for φD ≥ 8mm																																																													
TAN δ	Less than 300% of specified value for φD ≤ 6.3mm Less than 200% of specified value for φD ≥ 8mm																																																													
LEAKAGE CURRENT	Within specified value																																																													
Shelf Life Test	<p>Test time: 1,000 hours; other items are the same as those for the Endurance. The rated voltage shall be applied to the capacitors before the measurements for 160 ~ 450V (refer to JIS C 5101-4 4.1)</p>																																																													
Ripple Current & Frequency Multipliers	<table border="1"> <tr> <th>FREQ. (Hz)</th> <th>50</th> <th>120</th> <th>1K</th> <th>10K up</th> </tr> <tr> <th>CAP. (μF)</th> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <th>UNDER 1,000</th> <td>0.80</td> <td>1.00</td> <td>1.25</td> <td>1.40</td> </tr> <tr> <th>1,000 < C ≤ 8,200</th> <td>0.85</td> <td>1.00</td> <td>1.15</td> <td>1.25</td> </tr> </table>	FREQ. (Hz)	50	120	1K	10K up	CAP. (μF)					UNDER 1,000	0.80	1.00	1.25	1.40	1,000 < C ≤ 8,200	0.85	1.00	1.15	1.25																																									
FREQ. (Hz)	50	120	1K	10K up																																																										
CAP. (μF)																																																														
UNDER 1,000	0.80	1.00	1.25	1.40																																																										
1,000 < C ≤ 8,200	0.85	1.00	1.15	1.25																																																										

MARKING

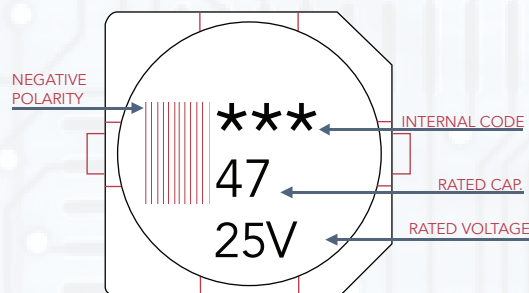

DIMENSION & PERMISSIBLE RIPPLE CURRENT

VDC	CONTENTS	6.3V (0J)		10V (1A)		16V (1C)		25V (1E)		35V (1V)		50V (1H)		63V (1J)		100V (2A)	
		φDxL	mA	φDxL	mA	φDxL	mA	φDxL	mA	φDxL	mA	φDxL	mA	φDxL	mA	φDxL	mA
1	1R0											4x5.7	8	4x5.7	8		
2.2	2R2											4x5.7	12	4x5.7	12		
3.3	3R3											4x5.7	14	5x5.7	17		
4.7	4R7							4x5.7	17	4x5.7	17	5x5.7	20	6.3x5.7	22		
10	100					4x5.7	20	4x5.7	20	5x5.7	27	6.3x5.7	32	6.3x5.7 8x6.5	32 51	8x6.5	51
22	220	4x5.7	22	4x5.7	22	5x5.7	30	5x5.7	30	6.3x5.7	44	6.3x5.7 8x6.5	38 67	6.3x7.7	58	8x10	100
33	330	5x5.7	34	5x5.7	34	5x5.7	34	6.3x5.7	46	6.3x5.7 8x6.5	46 76	6.3x7.7	65	8x10	140	10x10	150
47	470	5x5.7	38	5x5.7	38	6.3x5.7	48	6.3x5.7 8x6.5	48 79	6.3x7.7	80	6.3x7.7	70	8x10	170	12.5x13.5	250
100	101	6.3x5.7	69	6.3x5.7 8x6.5	69 90	6.3x5.7	69	6.3x7.7	100	8x10	240	8x10	210	10x10	310	12.5x13.5	380
220	221	6.3x7.7 8x6.5	120 120	6.3x7.7	120	6.3x7.7	120	8x10 10x7.7	270 270	8x10	270	10x10	330	12.5x13.5	470	16x16.5	450
330	331	8x10	290	8x10	290	8x10 10x7.7	290 290	8x10	290	10x10	370	12.5x13.5	490	16x16.5	650	18x16.5 16x21.5	590 750
470	471	8x10	320	8x10 10x7.7	320 320	10x10	380	10x10	380	12.5x13.5	520	12.5x16	550	16x16.5	700	18x21.5	980
1,000	102	10x10	410	10x10	410	12.5x13.5	550	12.5x16	550	16x16.5	800	18x16.5	990				
2,200	222	12.5x13.5	680	12.5x13.5	680	16x16.5	900	16x16.5	900	18x16.5	1,050						
3,300	332	12.5x16	850	16x16.5	950	16x16.5	950	18x16.5 16x21.5	1,150 1,200								
4,700	472	16x16.5	1,000	16x16.5	1,000	18x16.5 16x21.5	1,225 1,275	18x21.5	1,300								
6,800	682	18x16.5 16x21.5	1,290 1,350	18x16.5 16x21.5	1,290 1,350												
8,200	822	18x21.5	1,450	18x21.5	1,450												

VDC	CONTENTS	160V (2C)		200V (2D)		250V (2E)		400V (2G)		450V (2W)	
		φDxL	mA	φDxL	mA	φDxL	mA	φDxL	mA	φDxL	mA
4.7	4R7					12.5x13.5	65	12.5x13.5	45	12.5x13.5	45
10	100			12.5x13.5	80	12.5x13.5	70	12.5x13.5	50	12.5x16	75
22	220			12.5x16	110	12.5x13.5	105	16x16.5	85	16x16.5	85
33	330	12.5x13.5	95	12.5x16	120	16x16.5	180	18x16.5	100	18x16.5	100
47	470	12.5x16.5	205	16x16.5	220	16x16.5	220	18x21.5	130		
100	101	16x16.5	250	18x16.5	280	18x21.5	290				